

## Data sheet

### BMT-SI4 BACnet MS/TP

Page 1/8

P/N  
11088913

EAN 4250184160991


2024/11/27

Version: P


## Illustrations



Principle diagram



Wiring diagram



See enlarged drawings at the end of document

## Product specification

The BACnet MS/TP module with 4 S0 inputs according to DIN EN 62053-31 class A was developed for decentralized switching tasks. It is suitable, among other things, for counting S0 counter pulses. This allows very good integration of the module into an energy controlling system. In case of a power failure, the last counter readings are saved. The inputs can be scanned by means of standard objects via a BACnet client. When using the Accumulator Object, pulses up to 50 Hz can be counted, when using the PulseConverter object, pulses up to 500 Hz can be counted. Module address and bit rate are set with two rotary switches on the front. Suitable for decentralized mounting on DIN TH35 rail according to IEC 60715 in electrical distribution cabinets.

- Connection with screw type terminal blocks



### Technical Data

#### Approvals



Open Energy Management Equipment 34TZ



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BI.

#### RS485 interface

|                                   |  |
|-----------------------------------|--|
| Protocol                          | BACnet MS/TP   |
| Address range                     | 00 - F9  |
| Bus interface                     | RS485 two wire bus with potential equalization in bus or line topology<br>terminate with 120 Ohm |
| Transmission parameters           |  |
| Transmission rate                 | min. 9600 Bit/s (Bd)<br>max. 115200 Bit/s (Bd)   |
| Transmission rate default setting | 9600 Bit/s (Bd)  |
| Parity                            | None   |
| Stopbits                          | 1  |

#### Supply

|                             |                            |
|-----------------------------|----------------------------|
| Operating voltage           | 24 V AC/DC +/- 10 % (SELV) |
| Power consumption           |                            |
| Power consumption AC (max.) | 170 mA                     |
| Power consumption DC (max.) | 65 mA                      |
| Duty cycle relative         | 100 %                      |

#### Inputs

|   |   |
|---|---|
| S0 inputs acc. to DIN EN 62053-31 Class A | 4 |
|---|---|

### Technical Data

| Housing                              |   |
|--------------------------------------|---|
| Dimensions                           |   |
| Dimension (W x H x D)                | 35 mm x 69.3 mm x 60 mm   |
| Dimension (W x H x D)                | 1.378 in. x 2.728 in. x 2.362 in.   |
| Weight                               | 83 g  |
| Mounting style                       | Standard rail TH35  |
| Mounting position                    | any   |
| Apposition                           | without distance<br>The maximum quantity of BACnet modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary. |
| Connection type                      | Screw type terminal blocks  |
| Indicator                            | green, red and yellow LED   |
| Terminal blocks                      |   |
| Supply and bus                       |   |
| Terminal block                       | 4-pole  |
| Solid wire (AWG)                     | max. 1.5 mm <sup>2</sup> / max. 16 AWG  |
| Stranded wire (AWG)                  | max. 1 mm <sup>2</sup> / max. 18 AWG  |
| Wire diameter                        | min. 0.3 mm<br>max. 1.4 mm  |
| Module connection                    |   |
| Wire cross section solid             | 0.34 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12  |
| Wire cross section multi             | 0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12  |
| Wire cross section with wire ferrule | 0.25 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 22-12  |
| Screw torque (max.)                  | 0.5 Nm  |
| Stripping length (min.)              | 8 mm  |
| Protection circuit                   | Polarity reversal protection for DC operating voltage<br>Protection against interchanging power supply and bus  |

### Technical Data

| Material  |  |
|---|--|
| Color   | gray   |
| Material - Terminal block                                 | Polyamid 6.6 V0  |
| Material - Covers   | Polycarbonat   |
| Protection category according to IEC 60529                |  |
| Protection category - housing (acc. to IEC 60529)         | IP40   |
| Protection category - terminal blocks (acc. to IEC 60529) | IP20   |
| Climatic Data   |  |
| Operating   |  |
| Temperature - Operating °C                                | -5 °C - 55 °C  |
| Temperature - Operating °F                                | 23 °F - 131 °F   |
| Relative humidity   | max. 85 % non-condensing   |
| Storage   |  |
| Temperature - Storage °C                                  | -20 °C - 70 °C   |
| Temperature - Storage °F                                  | -4 °F - 158 °F   |
| Classifications   |  |
| ETIM 7.0  | EC000688   |
| ETIM 8.0  | EC000688   |
| ETIM 9.0  | EC000688   |
| Software and additional documents                         |  |
| Software and documentation                                | Further documentation is available for free download at <a href="http://www.metz-connect.com">www.metz-connect.com</a> |

### Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

## Accessories


| P/N      | Designation              |
|----------|--------------------------|
| 110369   | Terminal block Type 259  |
| 110486   | HUB DC                   |
| 110561   | Power supply NG4 24 V DC |
| 31135104 | Typ 135 RIACON 135_3.5   |

### Accessories from


| P/N        | Designation                   |
|------------|-------------------------------|
| 11088001   | BMT-RTR BACnet-Router         |
| 1108800170 | BMT-F-RTR BACnet-Router       |
| 11088101   | BMT-RTR/SC BACnet/SC Router   |
| 1108810170 | BMT-F-RTR/SC BACnet/SC Router |

### Illustrations

Dimensional drawing

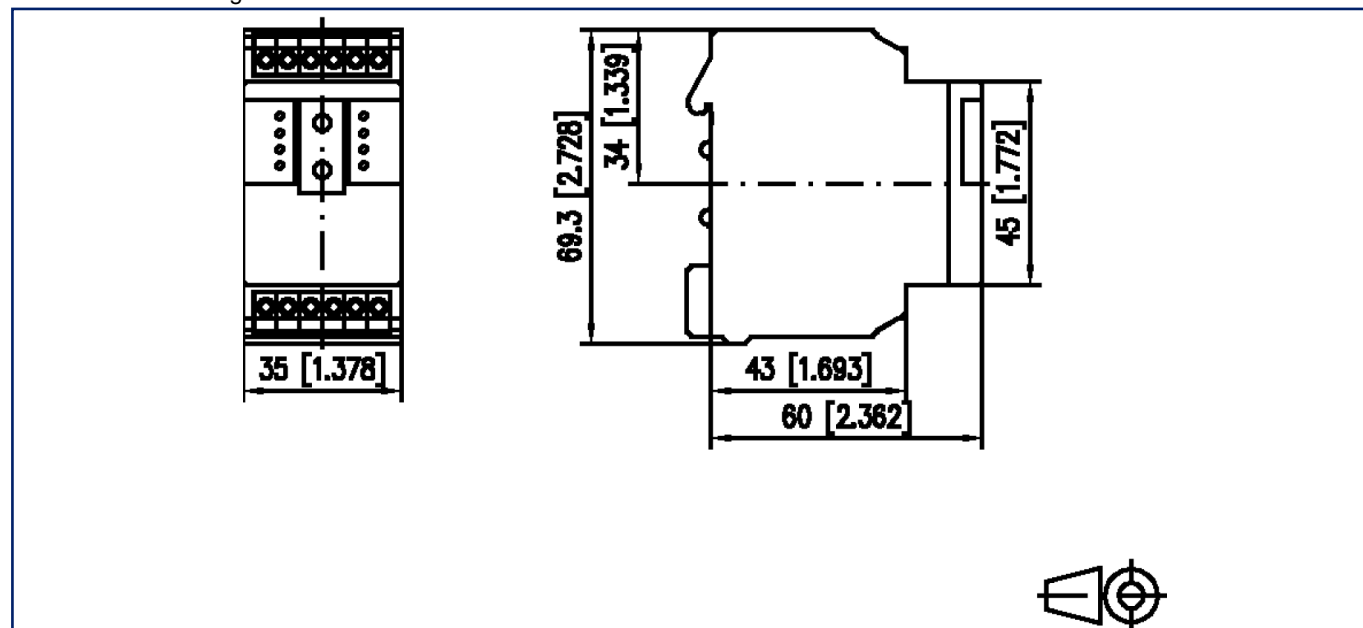

Wiring diagram

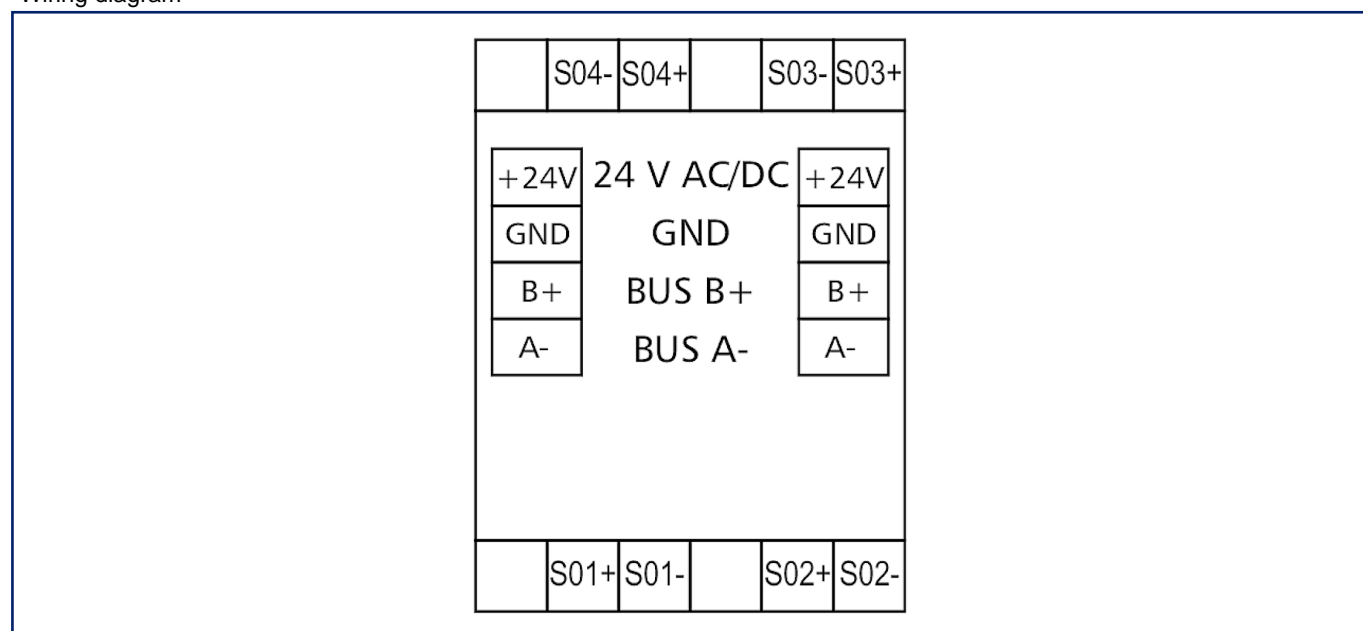

### Illustrations

#### Principle diagram

