

# Data sheet

Page 1/7


**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N  
**142MHA22020**  
EAN **4251394648255**  
2025/06/16  
Version: H


## Illustrations



Dimensional drawing

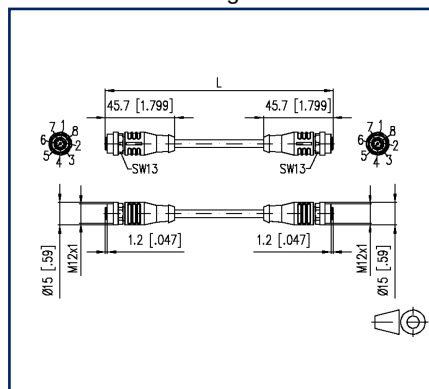

Wiring diagram

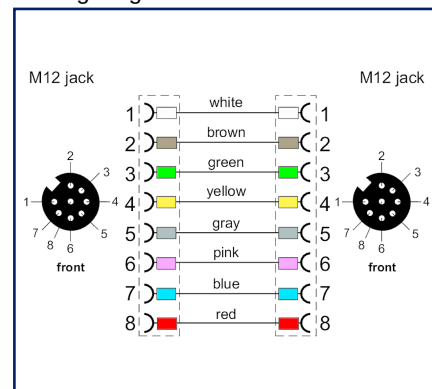

See enlarged drawings at the end of document

## Product specification

Flexible, silicone- and halogen-free control cable with high mechanical strength. The cable is resistant to chemicals, hydrolysis and microbes. The drag-chain application is possible at a bending radius of minimum 10xd. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine tools and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements. Special features: flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain resistant, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant

- Standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m.
- Other cable lengths on request.



## Data sheet

Page 2/7

# M12 Sensor/actuator cable, A-coded, 2.0 m, M12 jack straight - M12 jack straight, shielded, 8-pole, PUR-C

P/N

142MHA22020

EAN 4251394648255

2025/06/16

Version: H

## Technical Data

| General Data                                  |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| Fields of application                         | Industrial Ethernet                                |
| Design                                        | Sensor/actuator connection line M12, A-coded       |
| Shielding                                     | shielded                                           |
| Transmission technology                       | Copper                                             |
| Color coding fiber/ wire(s)                   | white, brown, green, yellow, gray, pink, blue, red |
| Color                                         | black                                              |
| Dimensions                                    |                                                    |
| Dimension - Interface 1 (L x W x H)           | 45.7 mm x 15 mm x 15 mm                            |
| Dimension - Interface 1 (L x W x H)           | 1.799 in. x 0.591 in. x 0.591 in.                  |
| Dimension - Interface 2 (L x W x H)           | 45.7 mm x 15 mm x 15 mm                            |
| Dimension - Interface 2 (L x W x H)           | 1.799 in. x 0.591 in. x 0.591 in.                  |
| Cable length (m)                              | 2 m                                                |
| Cable length (ft)                             | 6.56 ft                                            |
| Labeling option                               | identification label carrier                       |
| Connections/interfaces                        |                                                    |
| Connector technology interface 1              | M12-jack                                           |
| Connector technology interface 2              | M12-jack                                           |
| Coding interface 1                            | A-coded                                            |
| Coding interface 2                            | A-coded                                            |
| Number of positions/contacts interface 1      | 8                                                  |
| Number of positions/contacts interface 2      | 8                                                  |
| Termination data, stranded wire (min. - max.) |                                                    |
| Conductor cross section, stranded wire        | AWG 24/32                                          |
| Conductor cross section, stranded wire        | 0.25 mm <sup>2</sup>                               |
| Stranded wire structure                       | 32x0.10mm                                          |
| Cable sheath diameter (min. - max.)           |                                                    |
| Cable sheath diameter                         | 6.3 mm                                             |
| Cable sheath diameter                         | 0.248 in.                                          |



## Data sheet

Page 3/7

**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N  
142MHA22020  
EAN 4251394648255  
2025/06/16  
Version: H

## Technical Data

### Electrical characteristics

|                           |               |
|---------------------------|---------------|
| Current carrying capacity | 2 A at 40 °C  |
| Rated voltage             | 30 V          |
| Insulation resistance     | min. 100 MOhm |

### Mechanical data

|                                  |                                  |
|----------------------------------|----------------------------------|
| Life - Number of mating cycles   | min. 100                         |
| Torsion                          | +/-180°/m, >= 0.5 million cycles |
| Maximum operating bending radius | 75.6 mm                          |
| Alternating bending radius       | 75 mm                            |
| acceleration                     | 5 m/s <sup>2</sup>               |

### Materials and material properties

|                                           |                |
|-------------------------------------------|----------------|
| Material - Conductor                      | Cu (copper)    |
| Material - Conductor Insulation           | polypropylene  |
| Material - Cable jacket                   | PUR            |
| Material - Body interface 1               | Plastics       |
| Material - Body interface 2               | Plastics       |
| Material - Protective housing interface 1 | FPM/FKM        |
| Material - Protective housing interface 2 | FPM/FKM        |
| Material - Contact interface 1            | CuSn           |
| Material - Contact interface 2            | CuSn           |
| Material - Contact finish interface 1     | Au (gold)      |
| Material - Contact finish interface 2     | Au (gold)      |
| Material - Contact carriers interface 1   | Plastics       |
| Material - Contact carriers interface 2   | Plastics       |
| Material - Union nut interface 1          | CuZnPb (brass) |
| Material - Union nut interface 2          | CuZnPb (brass) |
| Material - Union nut finish interface 1   | Ni (nickel)    |
| Material - Union nut finish interface 2   | Ni (nickel)    |
| Flame retardancy                          | yes            |
| Halogen free                              | yes            |
| Oil resistance                            | yes            |
| UV-resistance                             | yes            |
| drag chain suitable                       | yes            |



## Data sheet

Page 4/7

**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N

142MHA22020

EAN 4251394648255

2025/06/16

Version: H

## Technical Data

### Materials and material properties

|           |           |
|-----------|-----------|
| torsional | yes       |
| RoHS      | compliant |

### Environmental conditions

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Temperature (min. - max.)            |                                  |
| Temperature - Operating °C           | -40 °C - 90 °C                   |
| Temperature - Operating °F           | -40 °F - 194 °F                  |
| Temperature - Installation °C        | -30 °C - 90 °C                   |
| Temperature - Installation °F        | -22 °F - 194 °F                  |
| Temperature - drag chain °C          | -25 °C - 60 °C                   |
| Temperature - drag chain °F          | -13 °F - 140 °F                  |
| Particulate ingress interface 1      | IP6X when plugged in             |
| Liquid ingress/immersion interface 1 | IPX5, IPX7, IPX8 when plugged in |
| Particulate ingress interface 2      | IP6X when plugged in             |
| Liquid ingress/immersion interface 2 | IPX5, IPX7, IPX8 when plugged in |
| Pollution degree interface 1         | 3                                |
| Pollution degree interface 2         | 3                                |

### Approvals

|                      |                  |
|----------------------|------------------|
| UL listed (file no.) | Approval pending |
|----------------------|------------------|

### Standards/Regulations

|                                     |                    |
|-------------------------------------|--------------------|
| Connectors for electronic equipment |                    |
| circular connector                  | DIN EN 61076-2-101 |

### Classifications

|          |          |
|----------|----------|
| ETIM 7.0 | EC001855 |
| ETIM 8.0 | EC001855 |
| ETIM 9.0 | EC001855 |



## Data sheet

Page 5/7

**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N

142MHA22020

EAN 4251394648255

2025/06/16

Version: H

**Technical Data****Packing details**

|                   |                       |
|-------------------|-----------------------|
| Type of packaging | 1 pc(s) / plastic bag |
|-------------------|-----------------------|

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



## Data sheet

Page 6/7

**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N

142MHA22020


EAN 4251394648255

2025/06/16


Version: H

## Illustrations

### Dimensional drawing

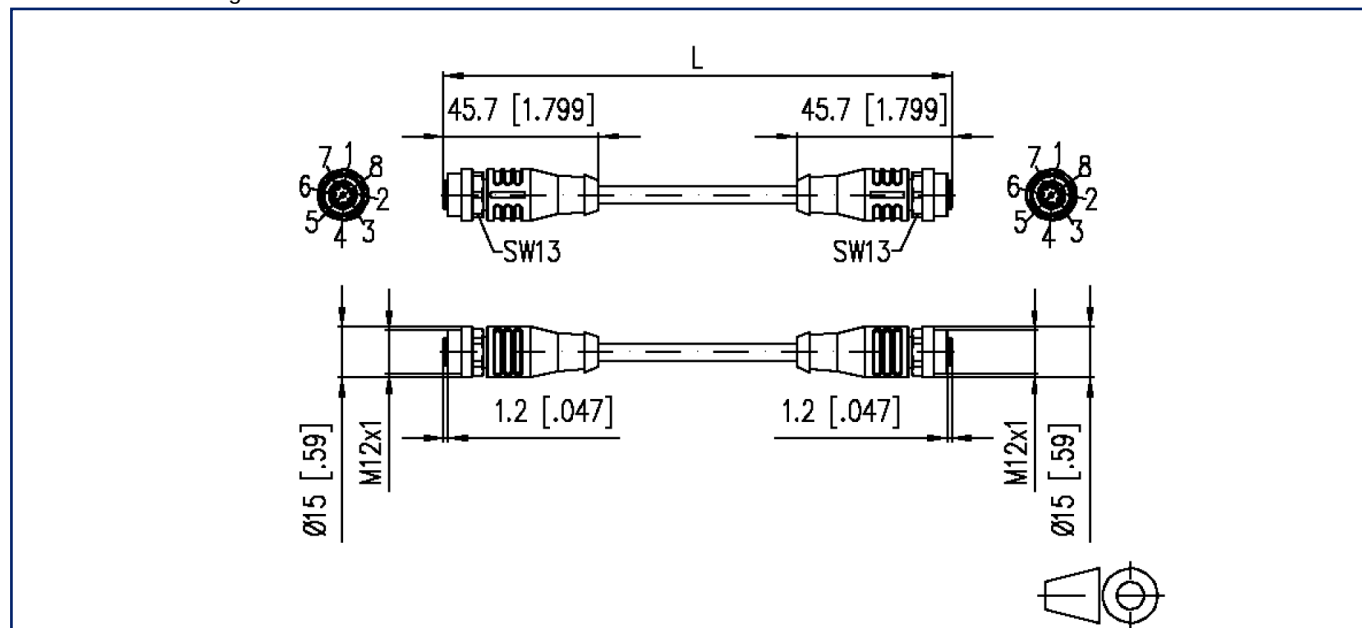

### Wiring diagram

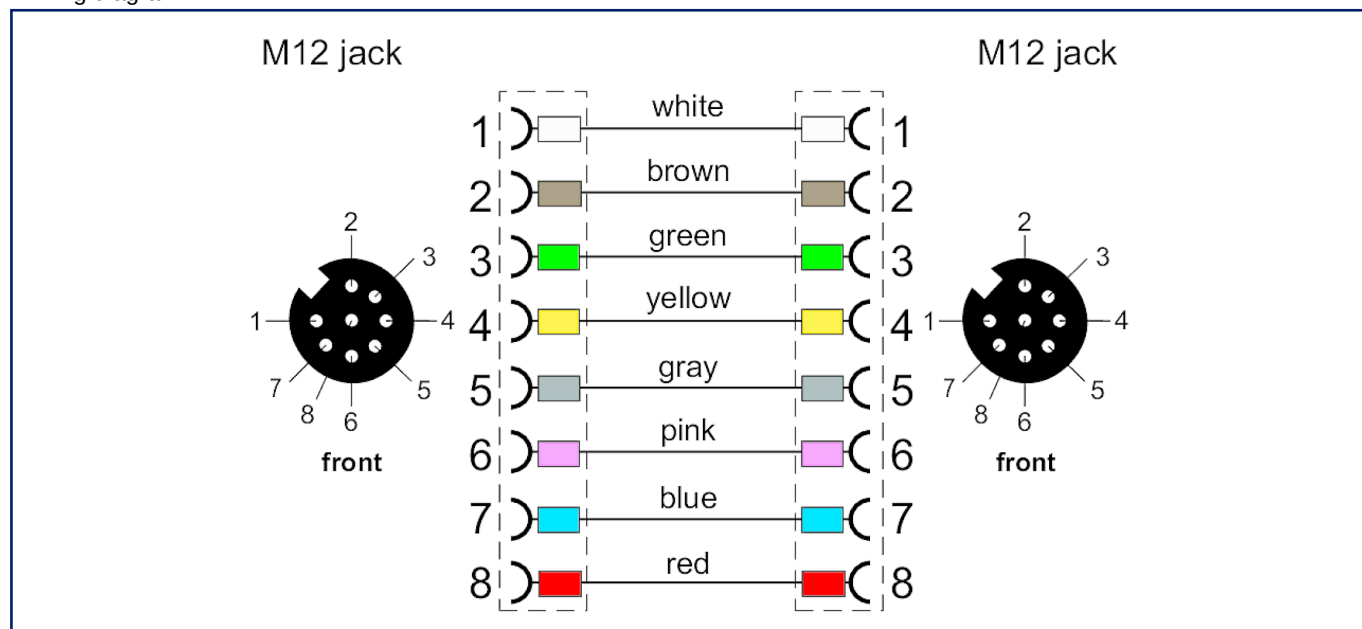

## Data sheet

Page 7/7

**M12 Sensor/actuator cable, A-coded, 2.0 m,  
M12 jack straight - M12 jack straight,  
shielded, 8-pole, PUR-C**

P/N

142MHA22020

EAN 4251394648255

2025/06/16

Version: H

## Illustrations

Principle diagram

