

Data sheet

RW043xxHBLD Type 513

Page 1/6

P/N

315131xx

xx=number of poles


2025/04/30

Version: D

Illustrations



Dimensional drawing as an example

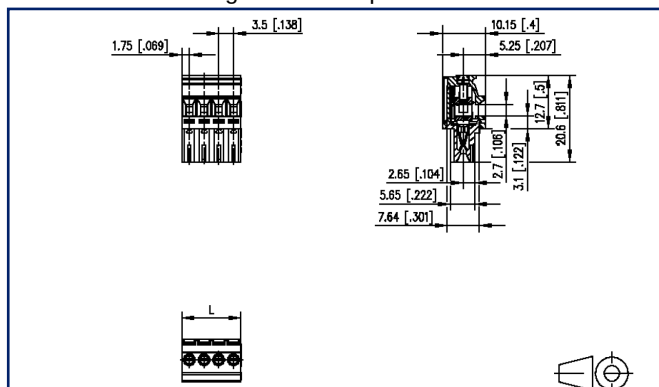

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 3.50 mm, direction of connection 90°
- lift system, fittable without loss of poles
- color black
- with alternative face, wire entry codeable side perpendicular to plug direction



Technical Data

General Data			
Tightening torque SEV	0.25 Nm		
Tightening torque UL	2.2 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	2.7 mm		
Protection category	IP20		
Insul. strip length	7 mm		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	4 kV	4 kV	4 kV
Terminal data			
rat.wiring solid AWGmax	0.08 mm² - 1.5 mm² / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm² - 1.5 mm² / AWG 28 - AWG 16		
Approvals			
extended wiring UL	Wire range extended to No. 16 AWG solid only.		
 V / A / AWG	300 / 10 / 28 - 16		
approval UL - File No.	E121004		
	130 V / 2.5 kV / 10 A		
Material			
insulating material	PA66		
flammability class	V0		
contact material	CuSn		
Contact surface	Sn		
terminal body thread	M2		
terminal body material	CuZnPb		
terminal body surface	Ni		
screw thread	M2		

U | Contact

Data sheet RW043xxHBLD Type 513

Page 3/6

P/N
315131xx

xx=number of poles

2025/04/30

Version: D

Technical Data

screw material	8,8
screw surface	Zn Cr(VI)-frei/free
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



U | Contact

Data sheet

Page 4/6

RW043xxHBLD Type 513

P/N

315131xx**xx=number of poles**

2025/04/30

Version: D

Accessories

P/N	Designation
700268-01-0	F_Kodier sw
700268-0132	F_Kodier sw
700268-0194	F_Kodier sw



U | Contact

Data sheet

Page 5/6

RW043xxHBLD Type 513

P/N

315131xx**xx=number of poles**

2025/04/30

Version: D


Counterpart

P/N	Designation
315231	PW063xxHBBN Type 523
315241	PW063xxVBBN Type 524
315271	PW063xxHBEC Type 527
315281	PW063xxVBEC Type 528



Illustrations

Dimensional drawing as an example

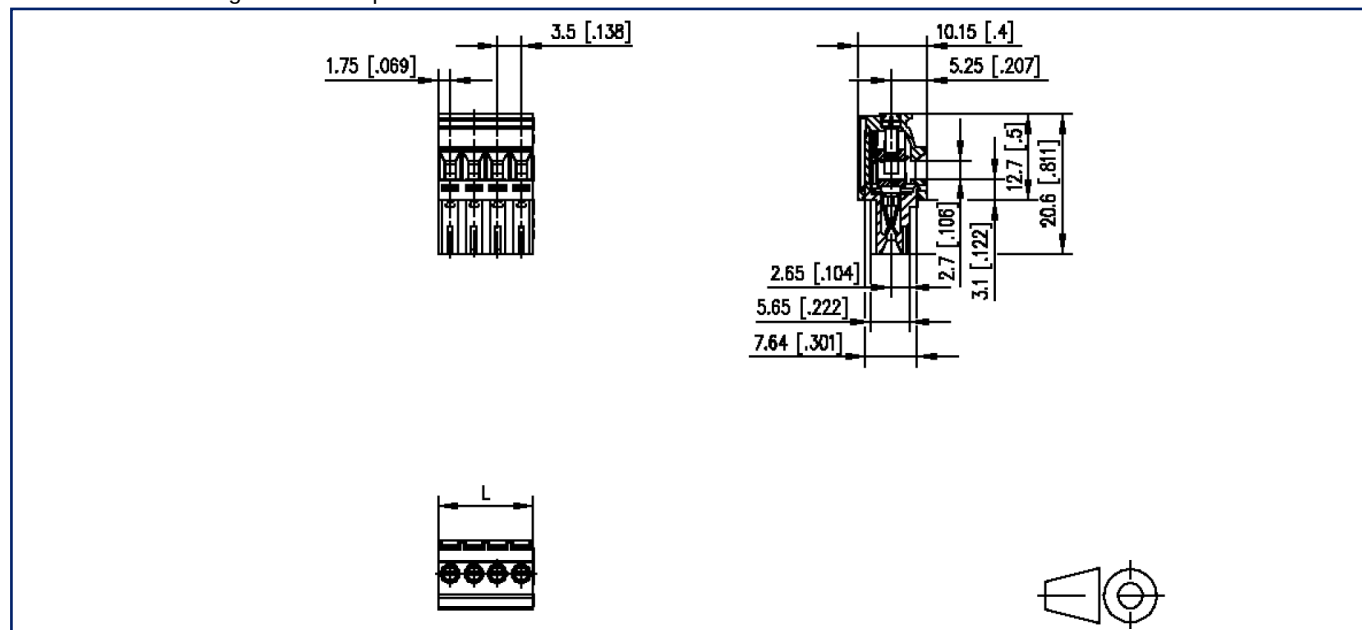
$$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm} [0.138]$$