



Data sheet
SR213xxVBNC AST213


Illustrations

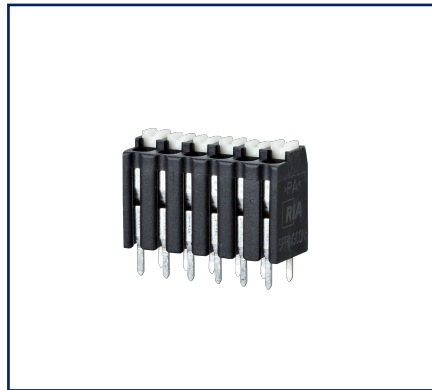

Dimensional drawing

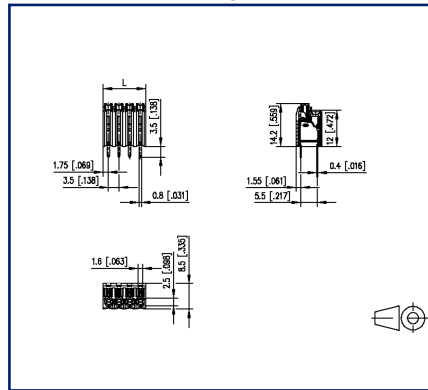

Drill pattern

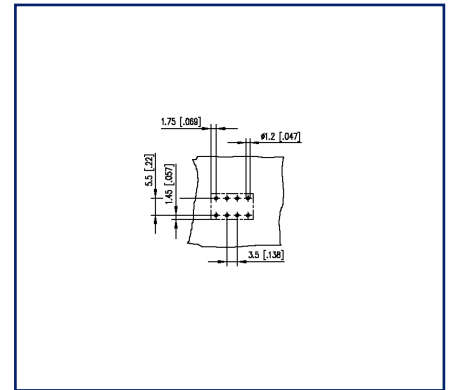

See enlarged drawings at the end of document



Product specification

- spring clamp terminal block, THR solderable, double solder pins
- centerline 3.50 mm, direction of connection vertical 0°
- fittable without loss of poles
- color black
- Tape & Reel packaging possible
- push-button

Technical Data

General Data			
Solder pin length	3.5 mm		
min. number of poles	2		
max. number of poles	12		
Insulating material class	CTI 600		
clearance/creepage dist.	2 mm		
Protection category	IP20		
Min. insul. strip length	8.5 mm		
Rated current	13.5 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Terminal data	
rat.wiring solid AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16
rat.wiring strand.AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16

Approvals	
 V / A / AWG	150 / 10 / 28 - 16
approval UL - File No.	E121004
 1.5 mm ²	130 V / 17.5 A / T60

Material	
insulating material	PA66/6T
flammability class	V0
spring material	Spring steel
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
REACH	compliant

Climatic Data	
upper limit temperature	105 °C
lower limit temperature	-40 °C

general

U | Contact

Data sheet
SR213xxVBNC AST213

Page 3/5

P/N
AST213xx
xx=number of poles
2022/04/05
Version: S

Technical Data


Tolerance	ISO 2768 -mH
Solderability	Acc. to IPC/JEDEC J-STD-020D-MSL 1

© 2022 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



Illustrations

Dimensional drawing

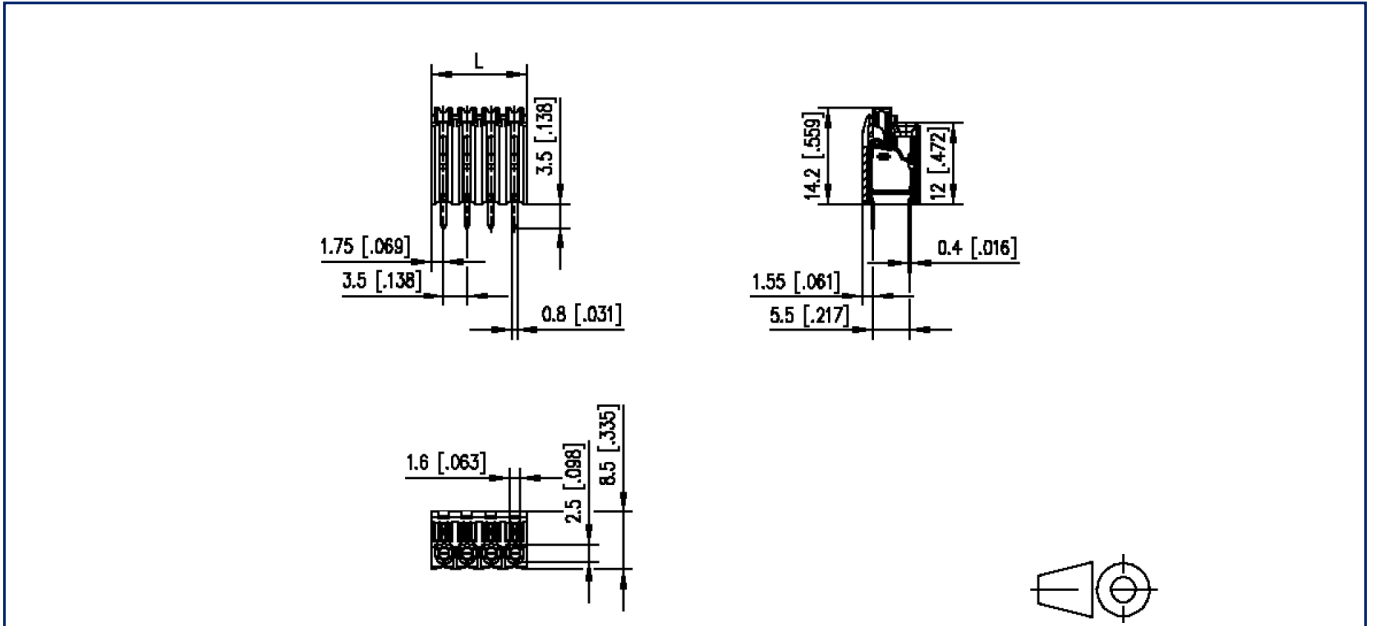


$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm } [0.138]$



Illustrations

Drill pattern

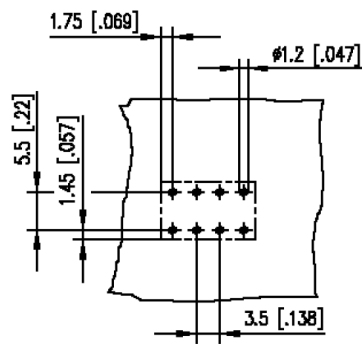

© 2022 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

