

Data sheet KD-M8/7A

Page 1/6


P/N 110640


EAN 4250184122814

2025/08/20 Version: G

Illustrations







See enlarged drawings at the end of document

Product specification

The diode module is equipped with 7 diodes. The anodes of the diodes are all connected to each other. The module is used for failure indication systems (lamp tests).

- · common anode
- Connection with screw-type terminals







Data sheet KD-M8/7A

Page 2/6

P/N 110640

EAN 4250184122814

2025/08/20 Version: G

| Technical Data | |
|---|--|
| Housing | |
| Dimensions | |
| Dimension (W x H x D) | 11.2 mm x 61.3 mm x 60 mm |
| Dimension (W x H x D) | 0.441 in. x 2.413 in. x 2.362 in. |
| Weight | 20 g |
| Mounting style | Standard rail TH35 |
| Mounting position | any |
| Apposition | without distance |
| Connection type | Screw type terminal blocks |
| Terminal blocks | |
| Wire cross section solid | 0.2 mm ² - 2.5 mm ² / AWG 22-12 |
| Wire cross section multi | 0.25 mm² - 2.5 mm² / AWG 22-12 |
| Wire cross section with wire ferrule | 0.25 mm ² - 2.5 mm ² / AWG 22-12 |
| Screw torque (max.) | 0.5 Nm |
| Stripping length (min.) | 8 mm |
| Material | |
| Material - Housing | Polyamid 6.6 V0 |
| Color | gray |
| Material - Terminal block | Polyamid 6.6 V0 |
| Protection category according to IEC 60529 | |
| Protection category - housing (acc. to IEC 60529) | IP40 |
| Protection category - terminal blocks (acc. to IEC 60529) | IP20 |
| Climatic Data | |
| Operating | |
| Temperature - Operating °C | -10 °C - 50 °C |
| Temperature - Operating °F | 14 °F - 122 °F |
| Relative humidity | max. 85 % non-condensing |
| Storage | |
| Temperature - Storage °C | -25 °C - 70 °C |
| Temperature - Storage °F | -13 °F - 158 °F |







Data sheet KD-M8/7A

Page 3/6

P/N 110640

EAN 4250184122814

2025/08/20 Version: G

| Technical Data | |
|-----------------|----------|
| Classifications | |
| ETIM 7.0 | EC002878 |
| ETIM 8.0 | EC002878 |
| ETIM 9.0 | EC002878 |
| ETIM 10.0 | EC002878 |

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).





Data sheet KD-M8/7A

Page 4/6

P/N 110640

EAN 4250184122814

2025/08/20 Version: G

Accessories

| P/N | Designation |
|-----|-------------|
| | |

820234-01-9 Labeling plate white



Data sheet KD-M8/7A

Page 5/6


P/N 110640

EAN 4250184122814

2025/08/20 Version: G

Illustrations

Dimensional drawing

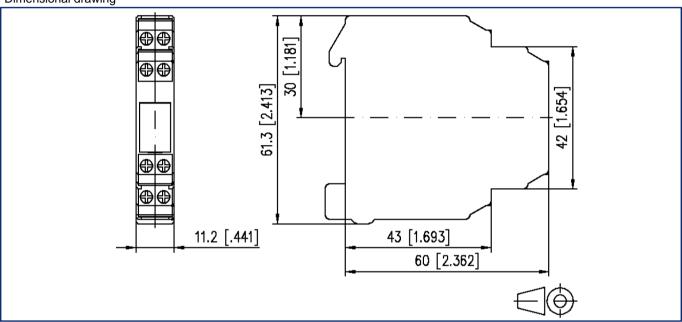

Wiring diagram

| 1 | 2 |
|---|---|
| 3 | 4 |
| | |
| | |
| | |
| | |
| | |
| 5 | 6 |
| 7 | 8 |

Data sheet KD-M8/7A

Page 6/6

P/N 110640

EAN 4250184122814

2025/08/20 Version: G

Illustrations

Circuit diagram

