

We realize ideas

Data sheet

KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC


Page 1/7


P/N 11070813


EAN 4250184123118

2025/08/19 Version: G

Illustrations







See enlarged drawings at the end of document

Product specification

Coupling devices are used to secure electrical isolation between logic and load.

- connection with spring-clamp terminal
- · additional terminals for jumper
- · test contacts for each terminal
- safe separation
- with manual control level and automatic-checkback function







Data sheet KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 2/7

P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

	version
Technical Data	
Supply	
Operating voltage	24 V AC/DC -15% +10%
Power consumption (max.)	13 mA
Response time typical	10 ms
Release time typical	5 ms
Manual control level	
Mechanical life	1x10 ³ switching cycles
Switching capacity (max.)	24 V AC/DC / 50 mA
Switching capacity (min.)	3 V AC/DC / 50 μA
Test voltage	100 V, 50 Hz, 1 min
Outputs	
Contacts	1 changeover contact
Contact material	AgSnO ₂
Switching voltage (max.)	250 V AC/DC
Continuous Current	8 A
Switching frequency	300 switching cycles/h
Breaking capacity (resistive load)	
Mechanical life	1x10 ⁷ switching cycles
Electrical life	1x10 ⁵ switching cycles
Indicator	green LED
Insulation coil - contact set	
Nominal voltage of the power supply system	230 / 400 V AC
Overvoltage category	III II
Degree of pollution	2 2
Rated test voltage	4 kV 2.5 kV
Type of insulation	basic insulation reinforced insulation
Housing	
Dimensions	
Dimension (W x H x D)	11.2 mm x 87.5 mm x 60 mm
Dimension (W x H x D)	0.441 in. x 3.445 in. x 2.362 in.
Weight	43 g
Mounting style	Standard rail TH35
Mounting position	any





Data sheet KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 3/7

P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

	version. G
Technical Data	
Housing	
Apposition	without distance
Connection type	Spring clamp terminal blocks
Terminal blocks	
Wire cross section solid	0,08 - 2,5 mm ² / AWG 28-14
Wire cross section multi	0.08 mm ² - 1.5 mm ² / AWG 28-16
Wire cross section with wire ferrule	0.08 mm ² - 2.5 mm ² / AWG 28-14
Stripping length (min.)	10 mm
Material	
Material - Housing	Polyamid 6.6 V0
Color	gray
Material - Terminal block	Polyamid 6.6 V0
Protection category according to IEC 60529	
Protection category - housing (acc. to IEC 60529)	IP20
Climatic Data	
Operating	
Temperature - Operating °C	-20 °C - 55 °C
Temperature - Operating °F	-4 °F - 131 °F
Relative humidity	max. 85 % non-condensing
Storage	
Temperature - Storage °C	-25 °C - 70 °C
Temperature - Storage °F	-13 °F - 158 °F
Power loss	
Power loss (typical) coil	900 mW
Power loss (typical) Contact rate	800 mW
Classifications	
ETIM 7.0	EC001437
ETIM 8.0	EC001437
ETIM 9.0	EC001437
ETIM 10.0	EC001437





We realize ideas

Data sheet KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 4/7

P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).







We realize ideas

Data sheet KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 5/7

P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

Accessories

P/N	Designation
110728	Connecting bridge, 10 pole
110729	Labeling plate



Data sheet

KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 6/7


P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

Illustrations

Dimensional drawing

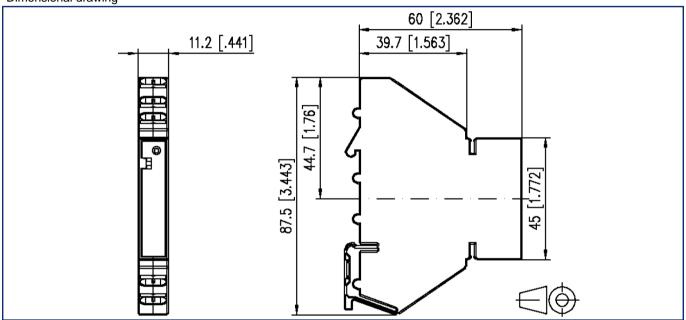

Wiring diagram



A1 - A2 operating voltage A2 - A3 operating voltage B1 - B2 switching contact 11 - 12 - 14 output contact 1 changeover contact

Data sheet

KRA-SR-F10/21, 1 changeover contact (SPST), 24 V AC/DC

Page 7/7

P/N 11070813

EAN 4250184123118

2025/08/19 Version: G

Illustrations

Circuit diagram

