

Data sheet

Page 1/6

E-DAT modul IP44 surface mounted housing unequipped


Dimensional drawing


P/N 1309430003-E EAN 4250184106609

> 2025/08/01 Version: Z

Illustrations







See enlarged drawings at the end of document

Product specification

- IP44 flat surface-mounted housing for two individual modules in Modul design
- IP44 protection only when closed (without plugged in patch cable)
- cable feed for one or two cables from the top
- · break-proof
- gray color





Data sheet E-DAT modul IP44 surface mounted housing unequipped Page 2/6

P/N 1309430003-E EAN 4250184106609

> 2025/08/01 Version: 7

	Version:
Technical Data	
General Data	
Fields of application	office areas
Mechanical measurement according to MICE	M1
Ingress measurement according to MICE	I1
Climatic measurement according to MICE	C1
Electromagnetic measurement according to MICE	E3
Design	wall outlet
Mounting style	AP
Color	gray
Dimensions	
Dimension (L x W x H)	58 mm x 87 mm x 75 mm
Dimension (L x W x H)	2.283 in. x 3.425 in. x 2.953 in.
Modularity	yes
Labeling option	on housing
Connections/interfaces	
Number of ports interface 2	2
Number of ports interface 2 equipped	0
Cable access/outlet	90° from the top
Mechanical data	
Cut-out	MC module
Materials and material properties	
Material - Housing	Thermoplastic
Halogen free	yes
RoHS	compliant
Environmental conditions	
Particulate ingress	IP4X when closed
1: :1: // .	15)/4

IPX4 when closed



Liquid ingress/immersion





Data sheet Page 3/6

E-DAT modul IP44 surface mounted housing unequipped

P/N 1309430003-E EAN 4250184106609

2025/08/01

Technical Data

Version: Z

. Oominour Dutu	
Classifications	
ETIM 7.0	EC001264
ETIM 8.0	EC001264
ETIM 9.0	EC001264
ETIM 10.0	EC001264

Packing details		
Type of packaging	10 pc(s) / box	
Packaging unit - Weight (gram)	135 g	
Packaging unit - Weight (pound)	0.3 lb	
Packaging dimension	115 mm x 93 mm x 90 mm	
Packaging dimension	4.528 in. x 3.661 in. x 3.543 in.	

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).







Data sheet Page 4/6

E-DAT modul IP44 surface mounted housing unequipped

P/N 1309430003-E EAN 4250184106609

> 2025/08/01 Version: Z

Accessories

P/N	Designation
130910-DNV	E-DAT modul Cat.6 _A 8(8) jack DNV
130910-I	E-DAT modul Cat.6 _A 8(8) jack
130910-I-B1	E-DAT modul Cat.6 _A 8(8) jack, T568B
130910-Z	E-DAT modul Cat.6 _A 8(8) jack, (12 pcs)
130B11-DNV	C6 _A modul 180° jack DNV
130B11-E	C6 _A modul 180° jack







Data sheet

Page 5/6

E-DAT modul IP44 surface mounted housing unequipped

P/N 1309430003-E


EAN 4250184106609

2025/08/01 Version: Z


© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Illustrations

Dimensional drawing

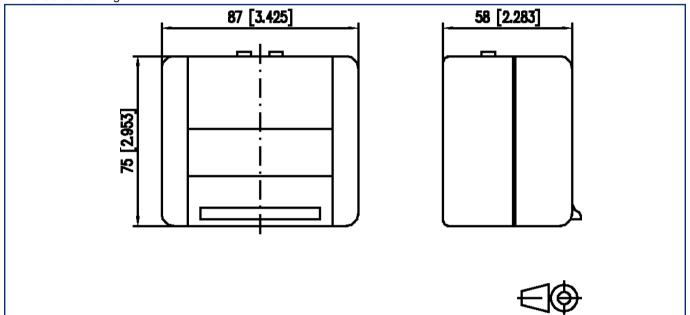

Drill pattern

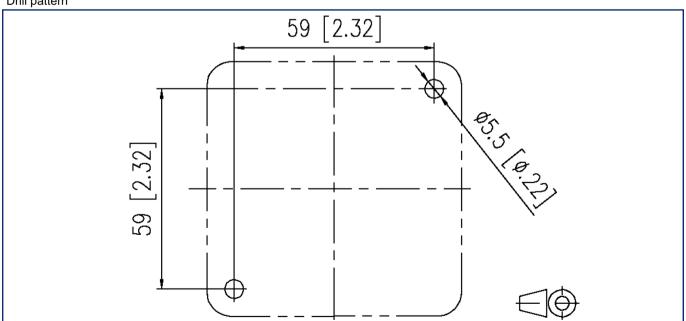



Data sheet Page 6/6

E-DAT modul IP44 surface mounted housing unequipped

P/N 1309430003-E EAN 4250184106609


> 2025/08/01 Version: Z

Illustrations

Cut-out t= 1.5±0.05 [.059±.002] 14.85+0.1 [.585+.004] 2.2±0.05 [.087±.002] 19.35±0.05 [.762±.004] 6.2±0.05 [.244±.002] 0.05 A 10±0.05 [.394±.002]

0.05

Wiring diagram

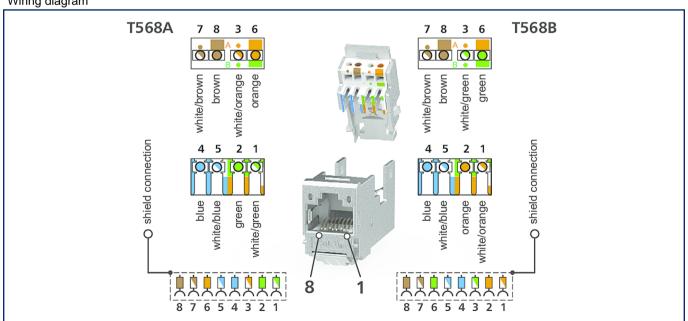

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!