

We realize ideas


## Data sheet RP09510RBWC Type 157 with clip system

Page 1/6

P/N 31157110

2025/08/22 Version: F

#### Illustrations



# Dimensional drawing as an example | 1.195 [.047] | 1.5 [.047] | 2.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [.047] | 3.5 [



See enlarged drawings at the end of document

#### **Product specification**

- · screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- · wire protector, fittable without loss of poles
- · color black
- pluggable, top side pin insertion, snap-in technique for mounting into a housing







Page 2/6

P/N 31157110

2025/08/22 Version: F

			V C1310	
Technical Data				
General Data				
Tightening torque SEV	0.5 Nm			
Tightening torque UL	4.4 lb-in			
pole size	10			
Insulating material class	CTI 600			
clearance/creepage dist.	4.15 mm			
Protection category	IP20			
Insul. strip length	6 mm			
Rated current	13.5 A			
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Rated voltage	63 V	320 V	320 V	
Rated test voltage	2.5 kV	2.5 kV	2.5 kV	
Terminal data				
at.wiring solid AWGmax	0.08 mm² - 2.5 mm² / AWG 28 - AWG 14			
rat.wiring strand.AWGmax	0.08 mm <sup>2</sup> - 2.	0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 14		
Approvals				
US V/A/AWG	300 / 5 / 28	- 14		
approval UL - File No.	E121004			
SEV	250 V / 4 kV	/ 13.5 A		
Material				
nsulating material	PA66	PA66		
flammability class	V0			
contact material	CuSn	CuSn		
Contact surface	Sn	Sn		
erminal body thread	M3			
erminal body material	CuZnPb			
erminal body surface	Ni	Ni		
screw thread	M3			
screw material	8,8			
screw surface	Zn Cr(VI)-frei	/free		







Page 3/6

P/N 31157110

2025/08/22 Version: F

Technical Data			
wire protector material	CuSn		
wire protector surface	Sn		
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12		
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13		
Climatic Data			
upper limit temperature	105 °C		
lower limit temperature	-40 °C		
general			
Tolerance	ISO 2768 -mH	ISO 2768 -mH	

#### **Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Page 4/6

P/N 31157110

2025/08/22 Version: F

### Counterpart

P/N	Designation
310461	PR035xxVBHC Type 046
313171	PM015xxVBHC Type 317
313181	PM025xxVBHC Type 318

We realize ideas

# Data sheet RP09510RBWC Type 157 with clip system


Page 5/6

P/N 31157110

2025/08/22 Version: F

#### Illustrations

Dimensional drawing as an example

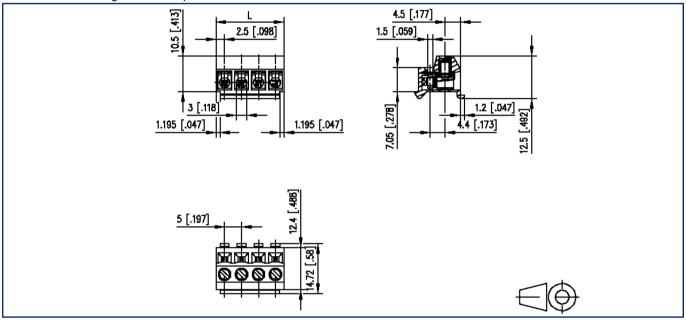

L=(pole size - 1) x centerline + 5 mm [0.197]



Page 6/6

P/N 31157110

2025/08/22 Version: F

#### Illustrations

Application example

