

Data sheet

RP023xxHBNF Type 165

Page 1/6

P/N

311651xx

xx=number of poles


2025/08/22

Version: AB

Illustrations



Dimensional drawing as an example

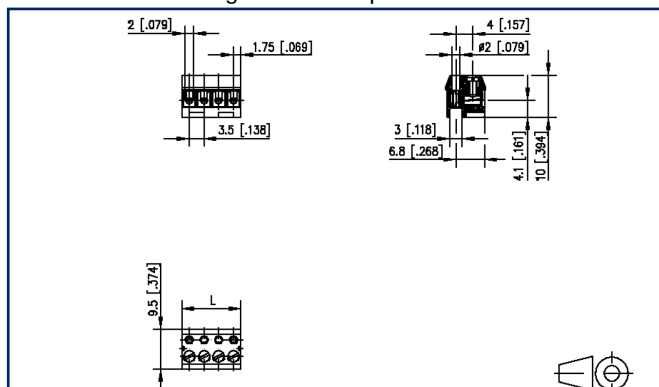

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 3.50 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black



Data sheet RP023xxHBNF Type 165

Page 2/6

P/N
311651xx

xx=number of poles

2025/08/22

Version: AB

Technical Data

General Data

Tightening torque SEV	0.15 Nm		
Tightening torque UL	1.3 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	2 mm		
Protection category	IP00		
Insul. strip length	5 mm		
Rated current	6 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	32 V	250 V	250 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Terminal data

rat.wiring solid AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16
rat.wiring strand.AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16

Approvals

 V / A / AWG	125 / 10 / 28 - 16
approval UL - File No.	E121004
	200 V / 2.5 kV / 6 A

Material

insulating material	PA66
flammability class	V0
contact material	CuNiZn
terminal body thread	M2
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M2
screw material	8,8
screw surface	Zn Cr(VI)-frei/free



Data sheet

RP023xxHBNF Type 165

Page 3/6

P/N
311651xx

xx=number of poles

2025/08/22

Version: AB

Technical Data

wire protector material	CuNiZn
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet
RP023xxHBNF Type 165

Page 4/6

P/N
311651xx
 xx=number of poles
 2025/08/22
 Version: AB

Accessories

P/N	Designation
720158-01-0	Befestigungsflansch kurz LP1mmfür Typ 165, 166 F_Befest_165_brg_kurz 1mm
720158-01-2	720158
720158-02-2	Mounting flange for type 166
720159-01-0	Kodierstift kurz für Typ 165, 166 F_Kodier_Typ165_brg_kurz
720159-01-2	Coding pin short for type 166
720159-02-0	Kodierstift lang für Typ 165, 166 F_Kodier_Typ165_brg_lang
720159-02-2	Coding pin long for type 166

Data sheet

Page 5/6

RP023xxHBNF Type 165

P/N

311651xx**xx=number of poles**

2025/08/22

Version: AB

Counterpart

P/N	Designation
310241	PR013xxVBHC Type 024



Data sheet

RP023xxHBNF Type 165

Page 6/6

P/N

311651xx


xx=number of poles

2025/08/22

Version: AB

Illustrations

Dimensional drawing as an example

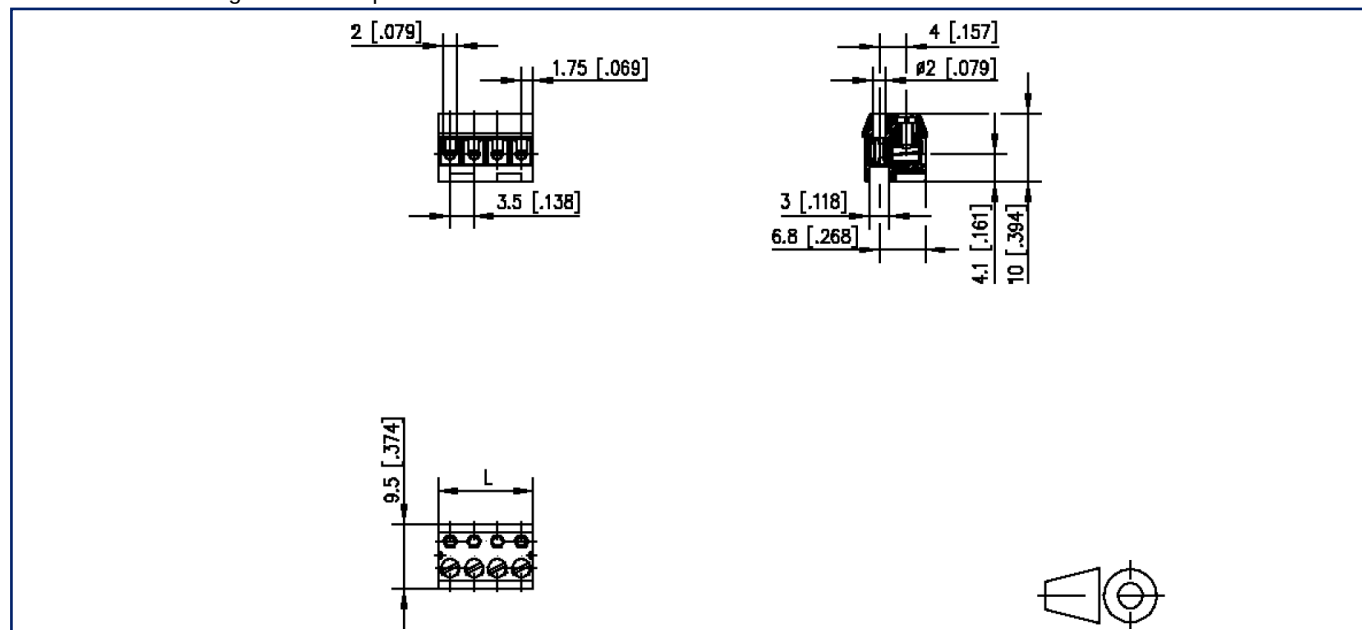

$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 \text{ mm} [0.138]$

