
Data sheet

RP02316HBWC Type 166


P/N
31166116

2025/08/18

Illustrations

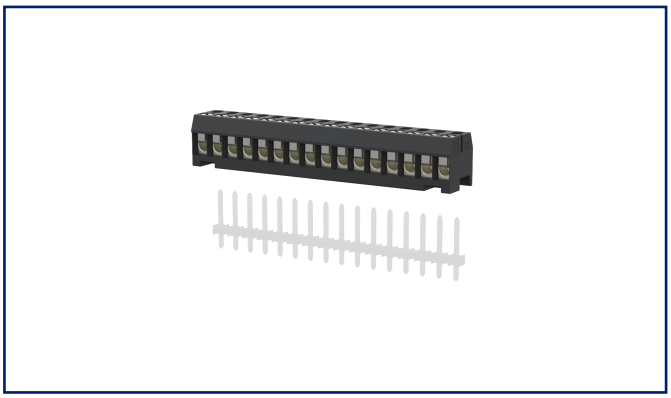

Dimensional drawing as an example

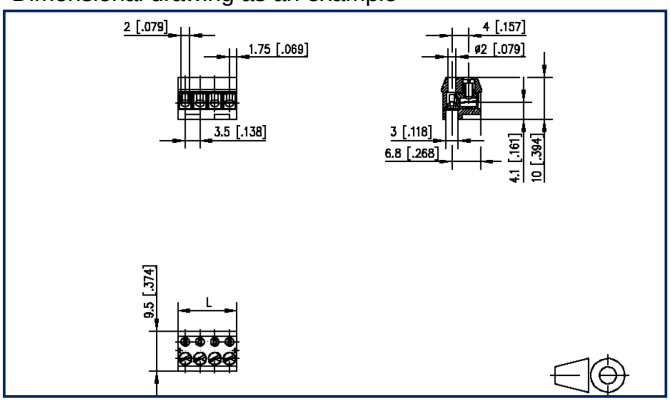

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 3.50 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black
- Wire entry perpendicular to plug direction

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433
Weitere Dokumentation siehe / additional documentation see / documentation supplémentaire voir www.metz-connect.com

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet
RP02316HBWC Type 166

P/N 31166116

2025/08/18

Technical Data

General Data			
Tightening torque SEV	0.15 Nm		
Tightening torque UL	1.3 lb-in		
pole size	16		
Insulating material class	CTI 600		
clearance/creepage dist.	2 mm		
Protection category	IP00		
Insul. strip length	5 mm		
Rated current	6 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	32 V	250 V	250 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV
Terminal data			
rat.wiring solid AWGmax	0.08 mm² - 1.5 mm² / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm² - 1.5 mm² / AWG 28 - AWG 16		
Approvals			
c UL us V / A / AWG	125 / 8 / 28 - 16		
approval UL - File No.	E121004		
SEV	200 V / 2.5 kV / 6 A		
Material			
insulating material	PA66		
flammability class	V0		
contact material	CuNiZn		
terminal body thread	M2		
terminal body material	CuZnPb		
terminal body surface	Ni		
screw thread	M2		
screw material	8,8		
screw surface	Zn Cr(VI)-frei/free		
wire protector material	CuNiZn		

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433
Weitere Dokumentation siehe / additional documentation see / documentation supplémentaire voir www.metz-connect.com

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet
RP02316HBWC Type 166

P/N 31166116

2025/08/18

Technical Data

Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
Climatic Data	
upper limit temperature	105 °C
lower limit temperature	-40 °C
general	
Tolerance	ISO 2768 -mH

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Data sheet
RP02316HBWC Type 166

P/N
31166116

2025/08/18

Accessories

P/N	Designation
720158-01-0	Befestigungsflansch kurz LP1mmfür Typ 165, 166 F_Befest_165_brg_kurz 1mm
720158-01-2	720158
720158-02-2	Mounting flange for type 166
720159-01-0	Kodierstift kurz für Typ 165, 166 F_Kodier_Typ165_brg_kurz
720159-01-2	Coding pin short for type 166
720159-02-0	Kodierstift lang für Typ 165, 166 F_Kodier_Typ165_brg_lang
720159-02-2	Coding pin long for type 166

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Counterpart

P/N	Designation
312241	PR033xxVBHC Type 224
312251	PT153xxHBEC Typ 225
312261	PT153xxVBEC Type 226
313331	PT023xxHBHC
314241	PM013xxVBHC Type 424

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!


Data sheet
RP02316HBWC Type 166

P/N
31166116

2025/08/18

Illustrations

Dimensional drawing as an example

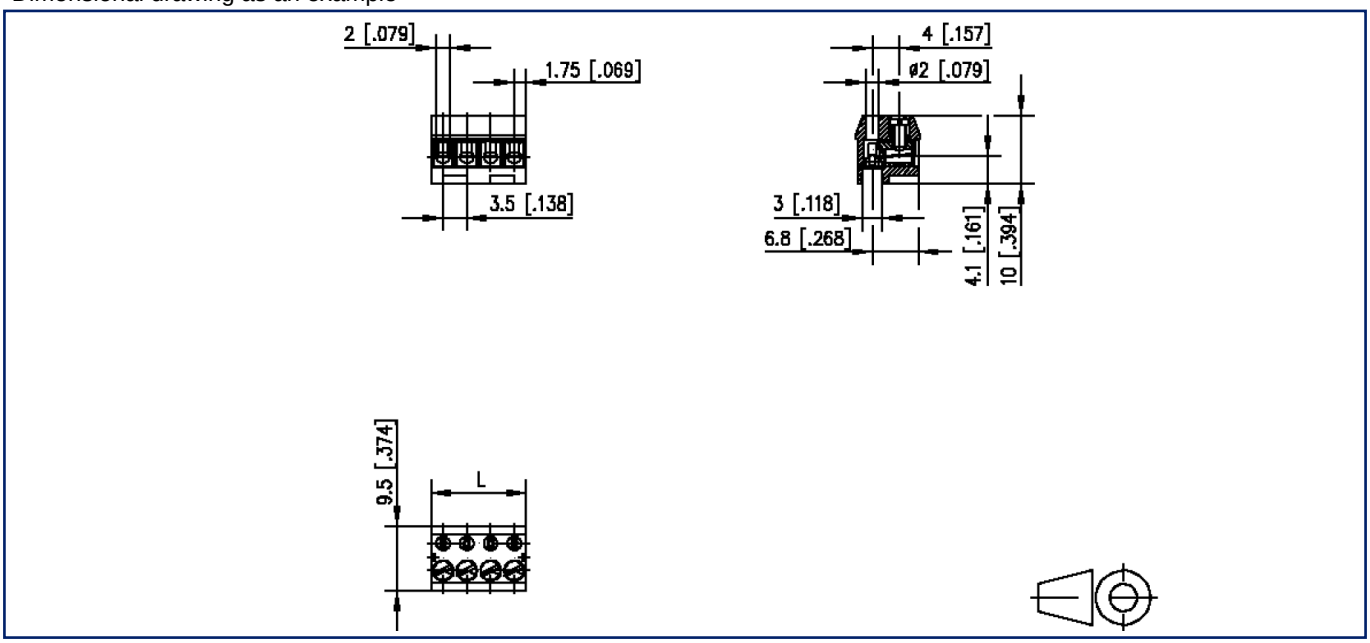

L=(pole size - 1) x centerline + 3.5 mm [0.138]

© 2025 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!