

# Data sheet

## PT113xxVBBN Type 183

Page 1/7

P/N


311831xx

xx=number of poles


2025/08/22

Version: X


### Illustrations

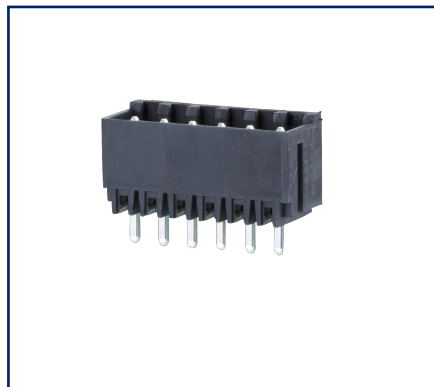

Dimensional drawing as an example

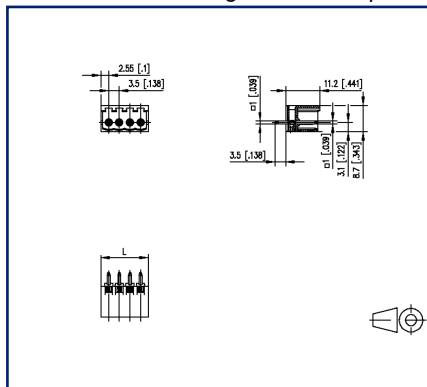

Drill pattern as an example

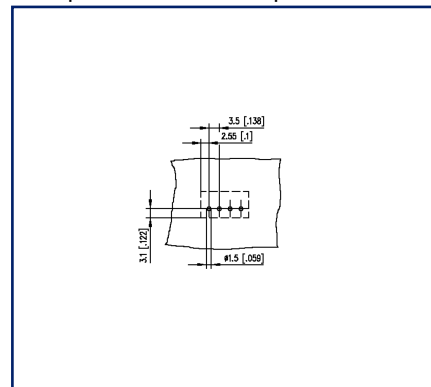

See enlarged drawings at the end of document

### Product specification

- pin header, solderable
- centerline 3.50 mm, direction of connection vertical 0°
- closed ends
- color black
- codeable



# Data sheet

## PT113xxVBBN Type 183

Page 2/7

P/N  
311831xx

xx=number of poles

2025/08/22

Version: X

### Technical Data

#### General Data

|                           |         |       |       |
|---------------------------|---------|-------|-------|
| Solder pin length         | 3.5 mm  |       |       |
| min. number of poles      | 2       |       |       |
| max. number of poles      | 18      |       |       |
| Insulating material class | CTI 600 |       |       |
| clearance/creepage dist.  | 2.5 mm  |       |       |
| Protection category       | IP00    |       |       |
| Rated current             | 10 A    |       |       |
| Overvoltage category      | III     | III   | II    |
| Pollution degree          | 3       | 2     | 2     |
| Rated voltage             | 200 V   | 500 V | 500 V |
| Rated test voltage        | 4 kV    | 4 kV  | 4 kV  |

#### Approvals



300 / 10

approval UL - File No.

E121004



125 V / 2.5 kV / 6 A / 1.0 x 1.0 mm

#### Material

|                             |                               |
|-----------------------------|-------------------------------|
| insulating material         | PA66                          |
| flammability class          | V0                            |
| contact pin material        | CuFe                          |
| contact pin surface         | Ni + Ag                       |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 |

#### Climatic Data

|                         |        |
|-------------------------|--------|
| upper limit temperature | 105 °C |
| lower limit temperature | -40 °C |

#### general

|               |                                     |
|---------------|-------------------------------------|
| Tolerance     | ISO 2768 -mH                        |
| Solderability | Acc. to JEDEC JESD22-B102E 245°C/5s |

#### Application note



## Data sheet

Page 3/7

## PT113xxVBBN Type 183

P/N

311831xx

xx=number of poles

2025/08/22

Version: X

**Technical Data**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



## Data sheet

Page 4/7

## PT113xxVBBN Type 183

P/N

311831xx

xx=number of poles

2025/08/22

Version: X

**Accessories**

| P/N         | Designation        |
|-------------|--------------------|
| 720243-01-3 | Coding star orange |
| 720243-02-4 | Coding star gray   |



Data sheet

Page 5/7

## PT113xxVBBN Type 183

P/N

311831xx

xx=number of poles

2025/08/22

Version: X

### Counterpart of

| P/N    | Designation          |
|--------|----------------------|
| 311691 | RP013xxVBWN Type 169 |



Data sheet

PT113xxVBBN Type 183

Page 6/7

P/N

311831xx


xx=number of poles

2025/08/22

Version: X

## Illustrations

Dimensional drawing as an example

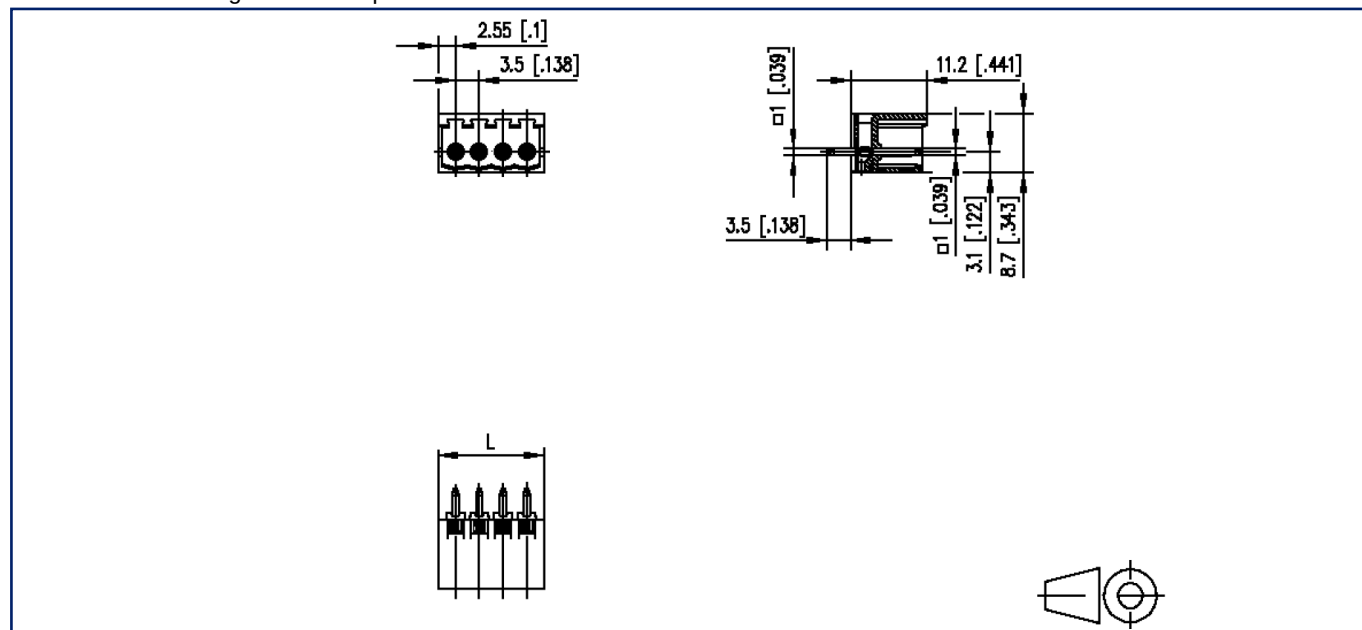

$L = (\text{pole size} - 1) \times \text{centerline} + 5.1 \text{ mm} [0.201]$



# Data sheet PT113xxVBBN Type 183

Page 7/7

P/N  
311831xx

xx=number of poles

2025/08/22

Version: X

## Illustrations

Drill pattern as an example

