

Data sheet

PR04309HBBN (Type 188)

Page 1/6


P/N
31188109

2026/09/07


Illustrations



Dimensional drawing as an example

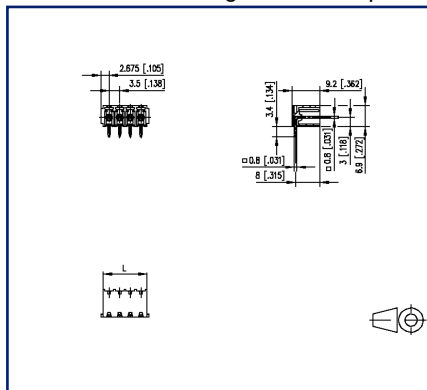

Drill pattern as an example

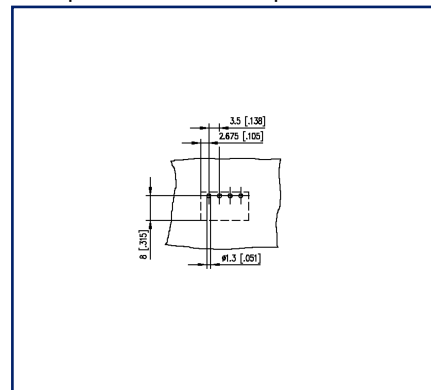

See enlarged drawings at the end of document

Product specification

- pin header, THR solderable
- centerline 3.50 mm, direction of connection 90°
- closed ends
- color black
- Tape & Reel packaging possible
- codeable



Data sheet
PR04309HBBN (Type 188)

Page 2/6

P/N
31188109

2026/09/07

Technical Data

General Data

Solder pin length	3.4 mm		
pole size	9		
Insulating material class	CTI 600		
clearance/creepage dist.	2.7 mm		
Protection category	IP00		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200 V	500 V	500 V
Rated test voltage	4 kV	4 kV	4 kV

Approvals



V / A

300 / 10

approval UL - File No.

E121004



130 V / 2.5 kV / 10 A / 0.8 x 0.8 mm

Material

insulating material	PA66/6T
flammability class	V0
contact pin material	CuMg
contact pin surface	Ni + Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	reflowable

Application note



Data sheet

Page 3/6

PR04309HBBN (Type 188)

**P/N
31188109**

2026/09/07

Technical Data

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Data sheet
PR04309HBBN (Type 188)

Page 4/6

P/N
31188109

2026/09/07

Counterpart of

P/N	Designation
709041	Tape_188_56mm Tape_188_56mm

Data sheet
PR04309HBBN (Type 188)


Page 5/6

P/N
31188109

2026/09/07

Illustrations

Dimensional drawing as an example

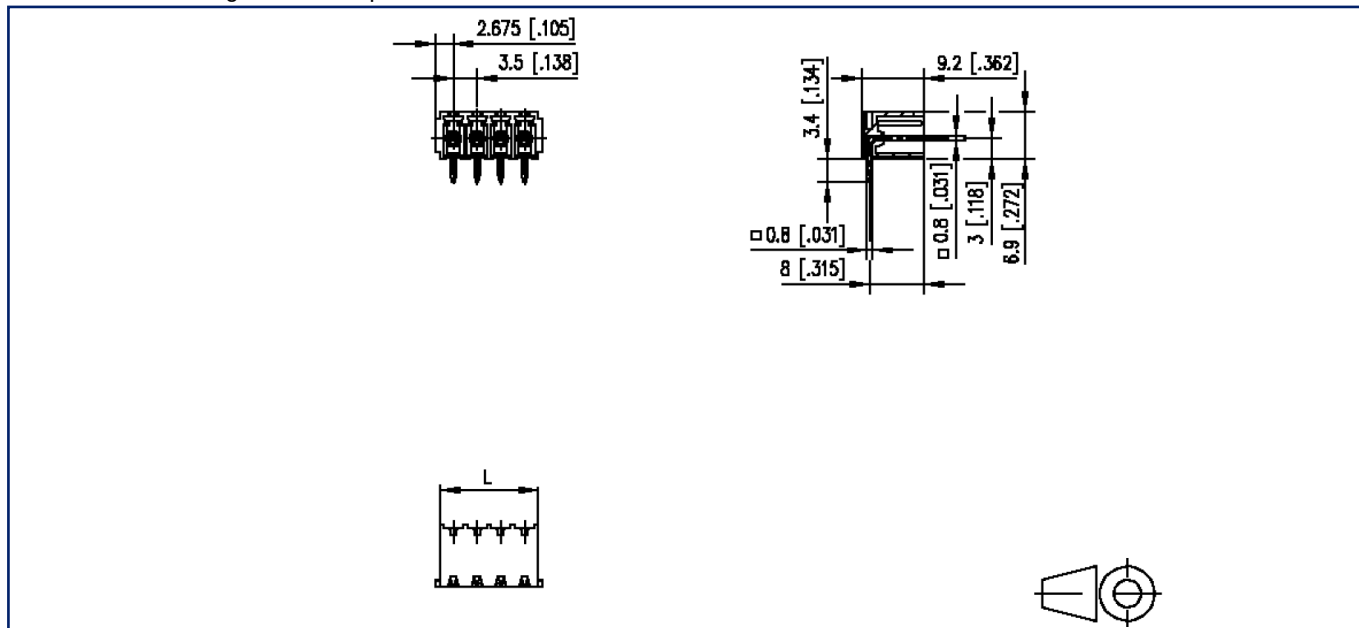

$L = (\text{pole size} - 1) \times \text{centerline} + 5.35 \text{ mm} [0.211]$



Data sheet
PR04309HBBN (Type 188)

Page 6/6

P/N
31188109

2026/09/07

Illustrations

Drill pattern as an example

