

Data sheet

PR043xxHBBN Type 188

Page 1/7

P/N
311881xx

xx=number of poles


2025/08/22

Version: AA


Illustrations



Dimensional drawing as an example

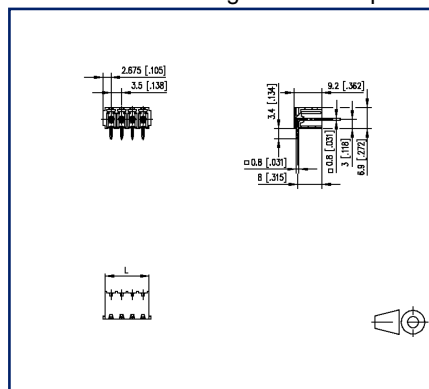

Drill pattern as an example

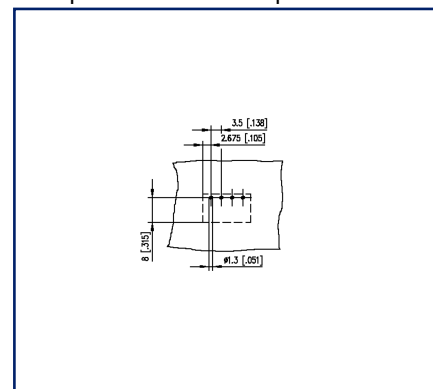

See enlarged drawings at the end of document

Product specification

- pin header, THR solderable
- centerline 3.50 mm, direction of connection 90°
- closed ends
- color black
- Tape & Reel packaging possible
- codeable

Data sheet

PR043xxHBBN Type 188

Page 2/7

P/N
311881xx

xx=number of poles

2025/08/22



Version: AA

Technical Data

General Data

Solder pin length	3.4 mm		
min. number of poles	2		
max. number of poles	16		
Insulating material class	CTI 600		
clearance/creepage dist.	2.7 mm		
Protection category	IP00		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200 V	500 V	500 V
Rated test voltage	4 kV	4 kV	4 kV

Approvals

 V / A	300 / 10
approval UL - File No.	E121004
	130 V / 2.5 kV / 10 A / 0.8 x 0.8 mm

Material

insulating material	PA66/6T
flammability class	V0
contact pin material	CuMg
contact pin surface	Ni + Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	reflowable

Application note

Data sheet

Page 3/7

PR043xxHBBN Type 188

P/N

311881xx

xx=number of poles

2025/08/22

Version: AA

Technical Data

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/7

PR043xxHBBN Type 188

P/N

311881xx**xx=number of poles**

2025/08/22

Version: AA

Accessories

P/N	Designation
720293-01-2	Coding Star for pin header, centerline 3.81 mm



Data sheet

PR043xxHBBN Type 188

Page 5/7

P/N

311881xx

xx=number of poles

2025/08/22

Version: AA

Counterpart of

P/N	Designation
310891	FT143xxVBFC Type 089
313391	RP033xxVBLC Type 339
316131	RP043xxHBLD Typ 613
316141	RP043xxHBLC Typ 614
ASP043	SP043xxVBNN ASP043
ASP0430222	SP04302VBNN ASP043
ASP0430322	SP04303VBNN ASP043
ASP0430422	SP04304VBNN ASP043
ASP0430522	SP04305VBNN ASP043
ASP0430622	SP04306VBNN ASP043
ASP0430722	SP04307VBNN ASP043
ASP0430822	SP04308VBNN ASP043
ASP0430922	SP04309VBNN ASP043
ASP0431022	SP04310VBNN ASP043
ASP0431122	SP04311VBNN ASP043
ASP0431222	SP04312VBNN ASP043
ASP063	SP063xxVGNN ASP063



Data sheet

PR043xxHBBN Type 188

Page 6/7

P/N

311881xx


xx=number of poles

2025/08/22

Version: AA

Illustrations

Dimensional drawing as an example

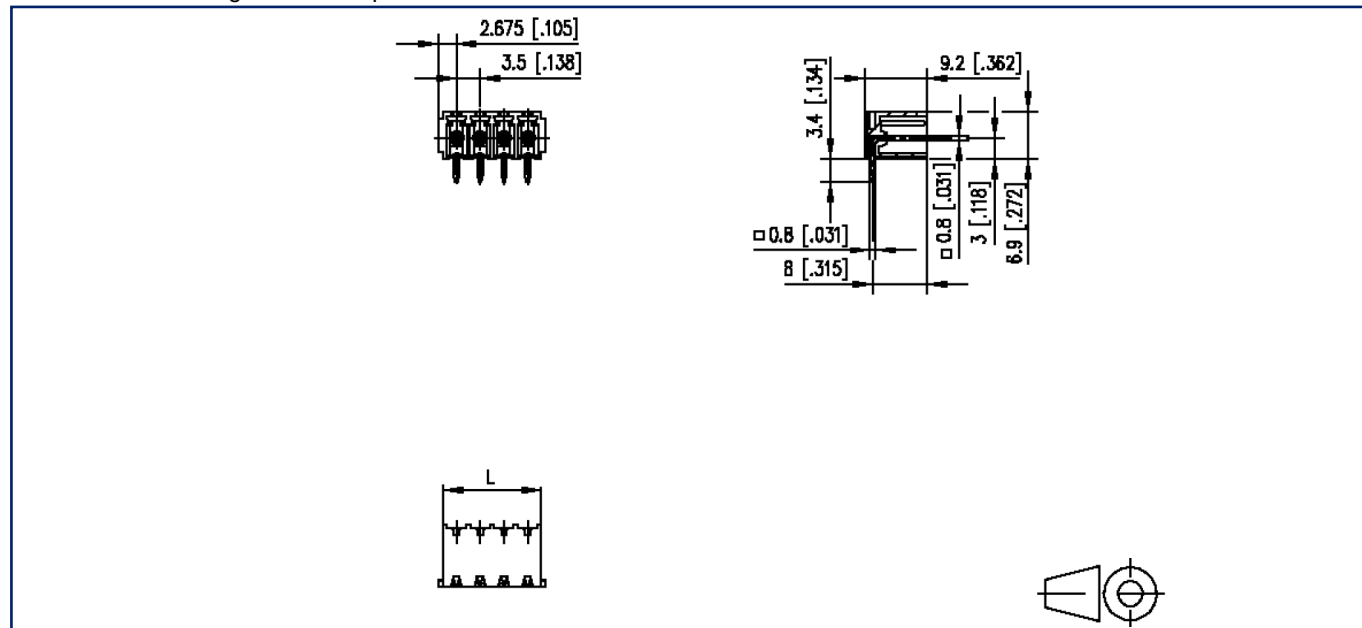

$L = (\text{pole size} - 1) \times \text{centerline} + 5.35 \text{ mm} [0.211]$



Data sheet PR043xxHBBN Type 188

Page 7/7

P/N
311881xx

xx=number of poles

2025/08/22

Version: AA

Illustrations

Drill pattern as an example

