

Data sheet

PR043xxHBBN (Type 188)

Page 1/6


P/N
311881xx

xx=number of poles


2026/09/07

Version: AB


Illustrations

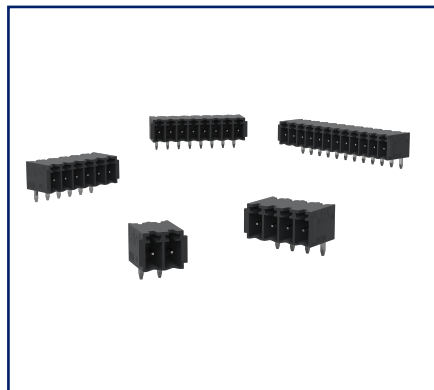

Dimensional drawing as an example

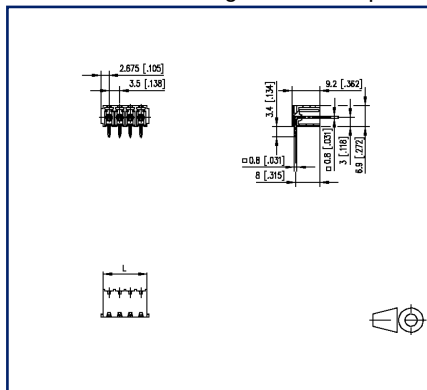

Drill pattern as an example

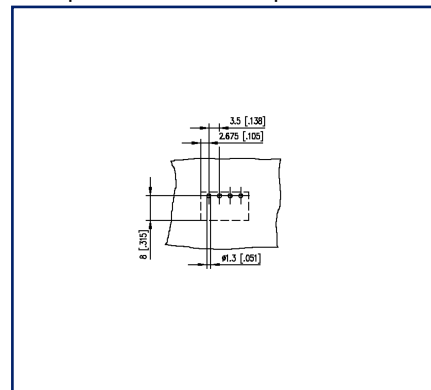

See enlarged drawings at the end of document

Product specification

- pin header, THR solderable
- centerline 3.50 mm, direction of connection 90°
- closed ends
- color black
- Tape & Reel packaging possible
- codeable



Data sheet

PR043xxHBBN (Type 188)

Page 2/6

P/N
311881xx

xx=number of poles

2026/09/07

Version: AB

Technical Data

General Data

Solder pin length	3.4 mm		
Insulating material class	CTI 600		
clearance/creepage dist.	2.7 mm		
Protection category	IP00		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200 V	500 V	500 V
Rated test voltage	4 kV	4 kV	4 kV

Approvals

 V / A	300 / 10
approval UL - File No.	E121004
	130 V / 2.5 kV / 10 A / 0.8 x 0.8 mm

Material

insulating material	PA66/6T
flammability class	V0
contact pin material	CuMg
contact pin surface	Ni + Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	reflowable

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

Data sheet
PR043xxHBBN (Type 188)

Page 3/6

P/N
311881xx
xx=number of poles
2026/09/07
Version: AB

Accessories

P/N	Designation
720293-01-2	Coding Star for pin header, centerline 3.81 mm



Data sheet

Page 4/6

PR043xxHBBN (Type 188)

P/N

311881xx

xx=number of poles

2026/09/07

Version: AB

Counterpart of

P/N	Designation
310891	FT143xxVBFC Type 089
313391	RP033xxVBLC (Type 339)
316131	RP043xxHBLD Typ 613
316141	RP043xxHBLC Typ 614
ASP043	SP043xxVBNN (ASP043)
ASP0430222	SP04302VBNN (ASP043), 2-pole
ASP0430322	SP04303VBNN (ASP043), 3-pole
ASP0430422	SP04304VBNN (ASP043), 4-pole
ASP0430522	SP04305VBNN (ASP043), 5-pole
ASP0430622	SP04306VBNN (ASP043), 6-pole
ASP0430722	SP04307VBNN (ASP043), 7-pole
ASP0430822	SP04308VBNN (ASP043), 8-pole
ASP0430922	SP04309VBNN (ASP043), 9-pole
ASP0431022	SP04310VBNN (ASP043), 10-pole
ASP0431122	SP04311VBNN (ASP043), 11-pole
ASP0431222	SP04312VBNN (ASP043), 12-pole
ASP063	SP063xxVGNN ASP063

Data sheet

Page 5/6

PR043xxHBBN (Type 188)

P/N

311881xx


xx=number of poles

2026/09/07

Version: AB

Illustrations

Dimensional drawing as an example

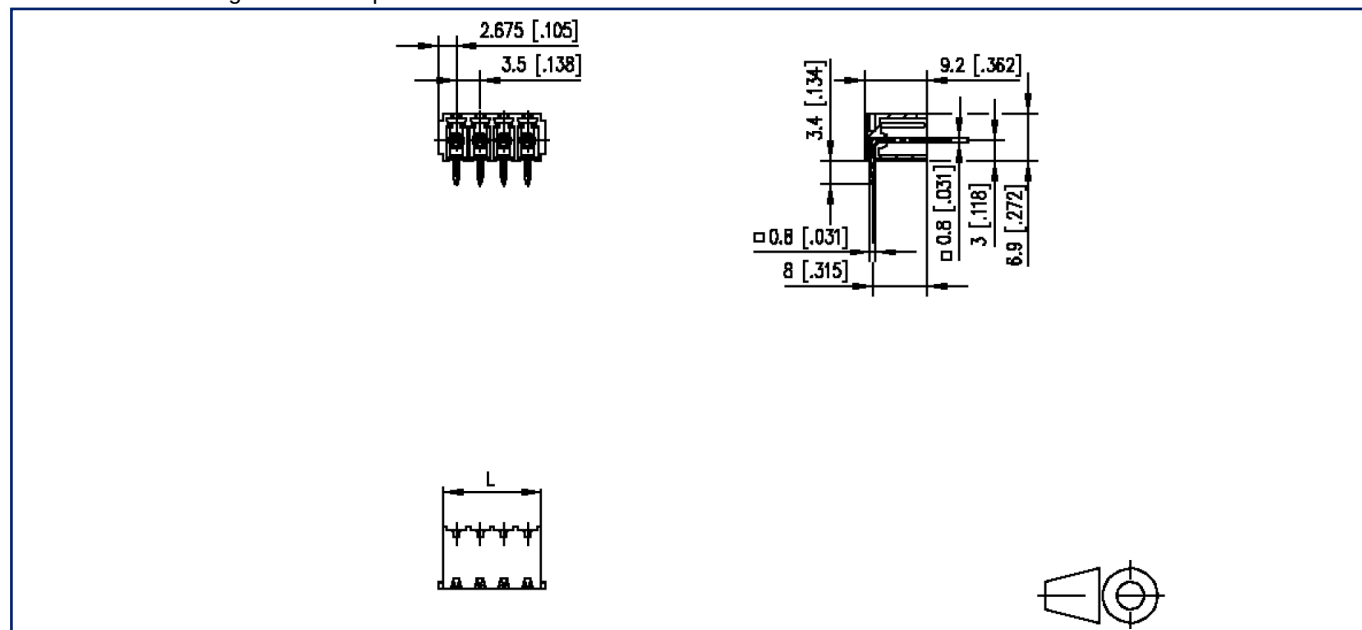

$L = (\text{pole size} - 1) \times \text{centerline} + 5.35 \text{ mm} [0.211]$



Data sheet PR043xxHBBN (Type 188)

Page 6/6

P/N
311881xx
xx=number of poles
2026/09/07
Version: AB

Illustrations

Drill pattern as an example

