

Data sheet RP025xxHBLC Type 207 Page 1/6


P/N 312071xx

xx=number of poles

2025/08/22 Version: AA

### Illustrations



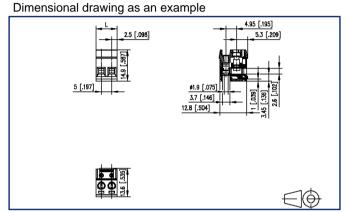



See enlarged drawings at the end of document

#### **Product specification**

- · screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- · lift system, fittable without loss of poles
- · color black
- Wire entry perpendicular to plug direction







# Data sheet RP025xxHBLC Type 207

Page 2/6

P/N 312071xx

xx=number of poles 2025/08/22

Version: AA

Technical Data				
General Data				
Tightening torque SEV	0.5 Nm			
Tightening torque UL	4.4 lb-in			
min. number of poles	2			
max. number of poles	24			
Insulating material class	CTI 600			
clearance/creepage dist.	3.2 mm			
Protection category	IP20			
Insul. strip length	6 mm			
Rated current	13.5 A			
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Rated voltage	200 V	500 V	500 V	
Rated test voltage	4 kV	4 kV	4 kV	
Terminal data				
rat.wiring solid AWGmax	0.08 mm <sup>2</sup> - 2.	0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12		
rat.wiring strand.AWGmax	0.08 mm <sup>2</sup> - 2.	5 mm² / AWG 28 - A\	NG 12	
Approvals				
US V/A/AWG	300 / 15 / 20	8 - 12		
approval UL - File No.	E121004			
SEV	250 V / 2.5 k	V /10 A		
Material				
insulating material	PA66			
flammability class	V0			
contact material	CuSn			
Contact surface	Sn	Sn		
terminal body thread	M3	M3		
terminal body material	CuZnPb			
terminal body surface	Ni	Ni		
screw thread	M3			
screw material	8,8			







Data sheet RP025xxHBLC Type 207

Page 3/6

P/N 312071xx

xx=number of poles

2025/08/22 Version: AA

Technical Data		
screw surface	Zn Cr(VI)-frei/free	
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12	
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13	
Climatic Data		
upper limit temperature	105 °C	
lower limit temperature	-40 °C	
general		
Tolerance	ISO 2768 -mH	

#### **Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



# Data sheet RP025xxHBLC Type 207

Page 4/6

P/N 312071xx

xx=number of poles 2025/08/22

Version: AA

### **Accessories**

P/N	Designation
720159-01-2	Coding pin short for type 166
720159-02-2	Coding pin long for type 166
750313	Mounting flange right for type 137
750314	Mounting flange left for type 137



Data sheet RP025xxHBLC Type 207

Page 5/6

P/N 312071xx

xx=number of poles 2025/08/22

Version: AA

$\sim$			
L.O			3171
$\mathbf{c}$	unte	<b>71 9</b> 4	ai t

P/N	Designation

310481 PR055xxVBHC Type 048

# Data sheet RP025xxHBLC Type 207

Page 6/6


P/N 312071xx

xx=number of poles

2025/08/22 Version: AA

### Illustrations

Dimensional drawing as an example

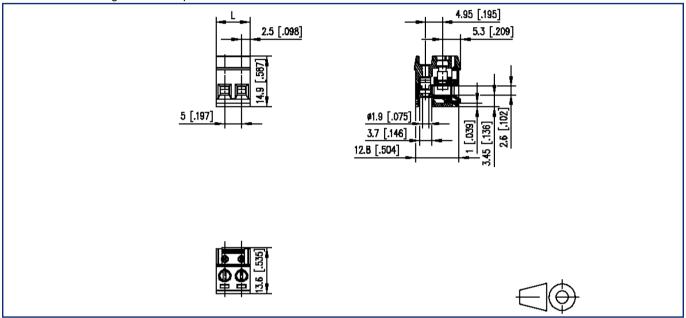

L=(pole size - 1) x centerline + 5 mm [0.197]