

Data sheet

RP034xxVBLN (Type 369)

Page 1/5

P/N


313691xx

xx=number of poles


2026/08/17

Version: Y

Illustrations

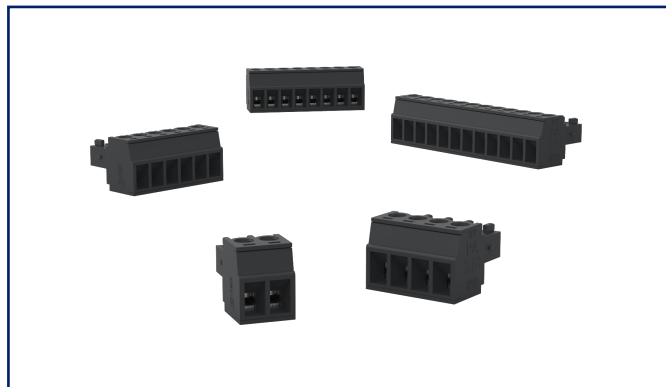

Dimensional drawing as an example

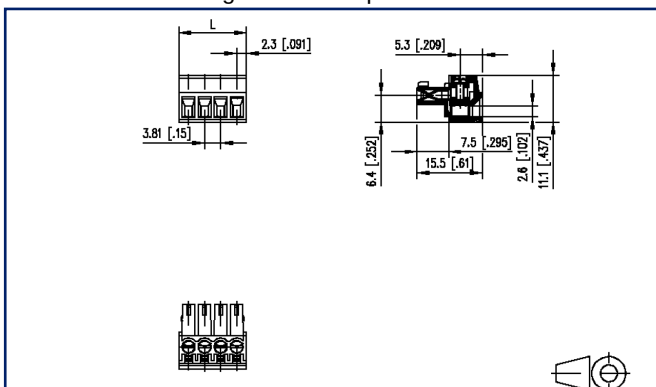

See enlarged drawings at the end of document

Product specification

- screw type terminal block, pluggable
- centerline 3.81 mm, direction of connection vertical 0°
- lift system
- color black
- wire entry codeable side perpendicular to plug direction



Data sheet

RP034xxVBLN (Type 369)

Page 2/5

P/N
313691xx

xx=number of poles

2026/08/17

Version: Y

Technical Data

General Data

Tightening torque SEV	0.25 Nm		
Tightening torque UL	2.2 lb-in		
Insulating material class	CTI 600		
clearance/creepage dist.	3.5 mm		
Protection category	IP20		
Insul. strip length	7 mm		
Rated current	8 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	40 V	250 V	250 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Terminal data

rat.wiring solid AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm ² - 1.5 mm ² / AWG 28 - AWG 16		

Approvals

 V / A / AWG	300 / 8 / 28 - 16		
approval UL - File No.	E121004		
	160 V / 2.5 kV / 9 A		

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
Contact surface	Sn
terminal body thread	M2
terminal body material	CuZnPb
terminal body surface	Ni
screw thread	M2
screw material	8,8
screw surface	Zn Cr(VI)-frei/free
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12

Data sheet

Page 3/5

RP034xxVBLN (Type 369)

P/N

313691xx

xx=number of poles

2026/08/17

Version: Y

Technical Data

Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13
-----------------------------	-------------------------------

Climatic Data

upper limit temperature	105 °C
-------------------------	--------

lower limit temperature	-40 °C
-------------------------	--------

general

Tolerance	ISO 2768 -mH
-----------	--------------

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet

Page 4/5

RP034xxVBLN (Type 369)

P/N

313691xx

xx=number of poles

2026/08/17

Version: Y

Counterpart

P/N	Designation
311901	PR044xxHBBN Type 190
311911	PR044xxVBBN Type 191
313821	PT094xxHBBN Type 382
313831	PT094xxVBBN Type 383



Data sheet

RP034xxVBLN (Type 369)

Page 5/5

P/N

313691xx


xx=number of poles

2026/08/17

Version: Y

Illustrations

Dimensional drawing as an example

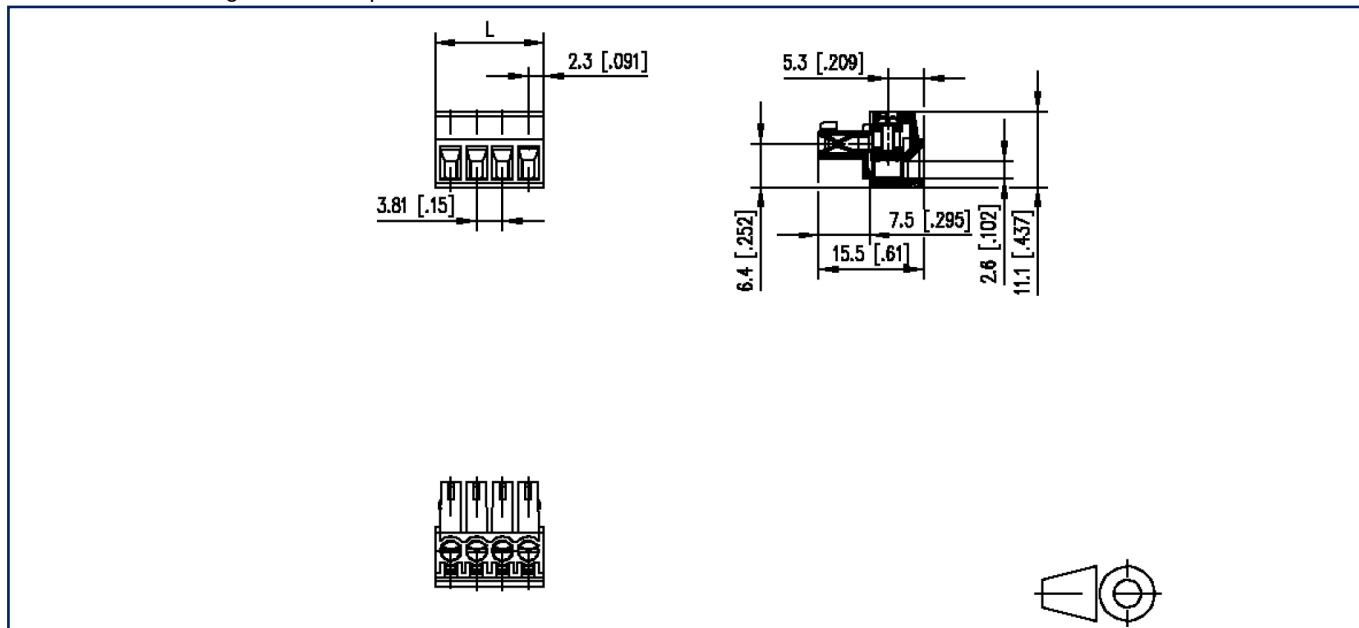

$L = (\text{pole size} - 1) \times \text{centerline} + 4.6 \text{ mm} [0.181]$

