

Data sheet

Type 360322

Page 1/3


P/N
360322

2025/08/21
Version: AG


Illustrations



Dimensional drawing as an example

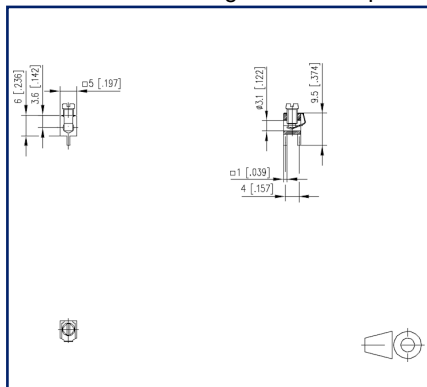

Drill pattern as an example

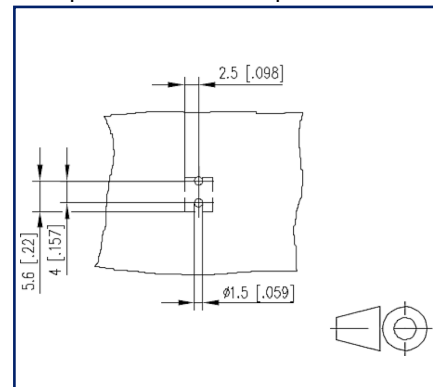

See enlarged drawings at the end of document

Product specification

- screw type terminal block, THR solderable, double solder pins
- direction of connection 90°
- wire protector
- color metallike
- open construction, screw brought down by hand (transport safety)



Data sheet

Type 360322

Page 2/3

P/N
360322

2025/08/21
Version: AG

Technical Data

General Data

Tightening torque SEV	0.5 Nm
Tightening torque UL	4.4 lb-in
Solder pin length	3.5 mm
min. number of poles	1
max. number of poles	1
Protection category	IP00

Terminal data

rat.wiring solid AWGmax	0.05 mm ² - 1.5 mm ² / AWG 30 - AWG 16
rat.wiring strand.AWGmax	0.05 mm ² - 1 mm ² / AWG 30 - AWG 18

Approvals

 A / AWG	15 / 30 - 16
approval UL - File No.	E130077

Material

terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni + Sn
screw thread	M3
screw material	8,8
screw surface	Zn Cr(VI)-frei/free
wire protector material	CuSn
wire protector surface	Sn

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to IPC/JEDEC J-STD-020E-MSL 1

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet Type 360322

Page 3/3


P/N
360322

2025/08/21

Version: AG

Illustrations

Dimensional drawing as an example

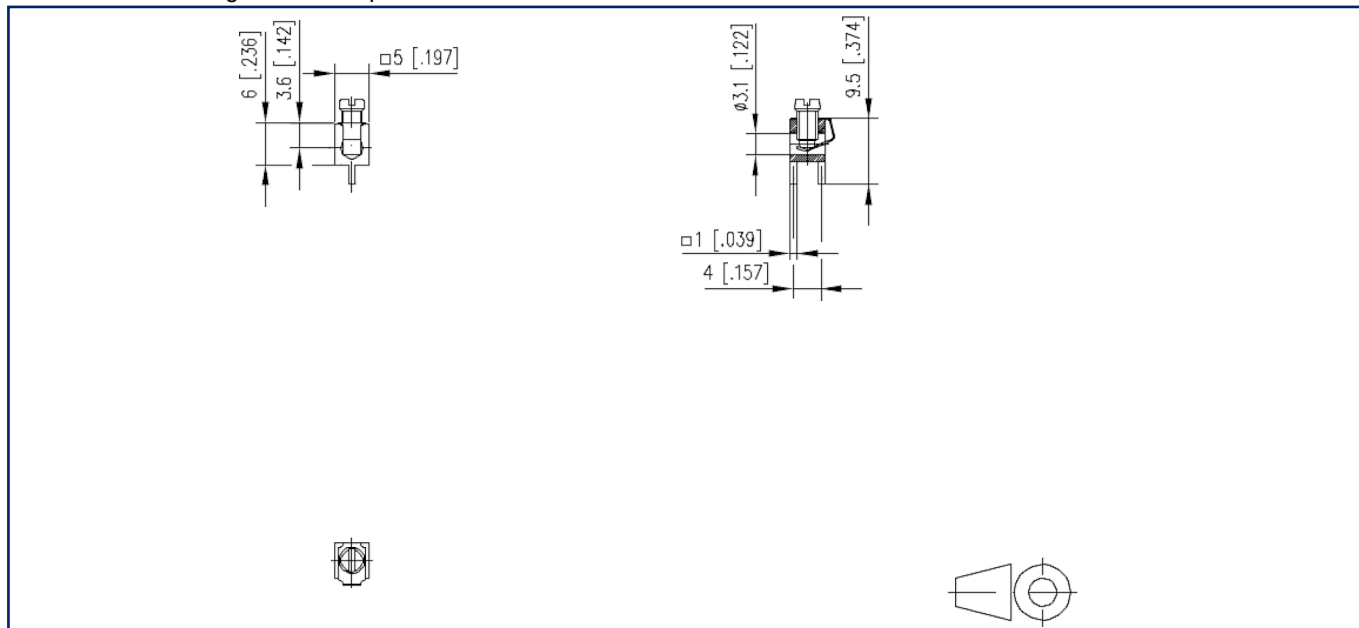

Drill pattern as an example

