
Data sheet
SP02504HDNC ASP025


P/N
ASP0250404

2026/11/09
Version: S

Illustrations

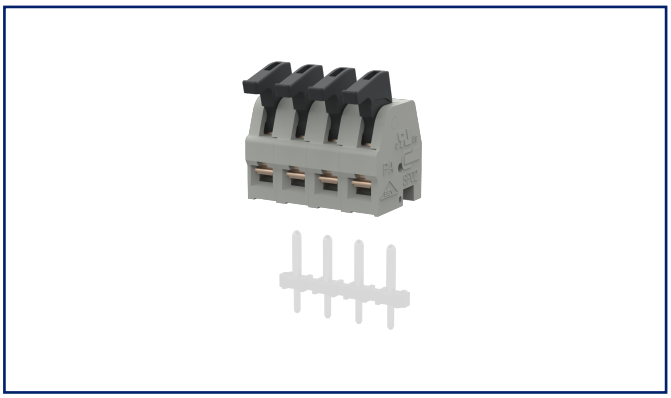

Dimensional drawing as an example

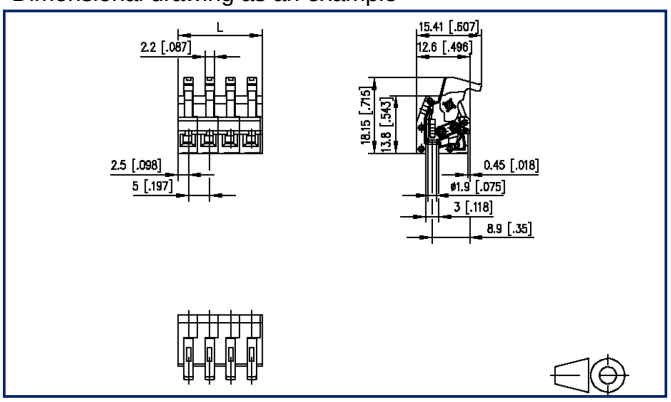

See enlarged drawings at the end of document

Product specification

- spring clamp terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- fittable without loss of poles
- color gray
- eccentric lever, wire entry perpendicular to plug direction

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433 | info@metz-connect.com
Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Technical Data

General Data			
pole size	4		
Insulating material class	CTI 600		
clearance/creepage dist.	3.7 mm		
Protection category	IP20		
Insul. strip length	4 mm		
Rated current	10 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	40 V	250 V	250 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV
Terminal data			
rat.wiring solid AWGmax	0.08 mm² - 1.5 mm² / AWG 28 - AWG 16		
rat.wiring strand.AWGmax	0.08 mm² - 0.75 mm² / AWG 28 - AWG 18		
Approvals			
c UL us V / A / AWG	300 / 8 / 28 - 16		
approval UL - File No.	E121004		
SEV	250 V / 4 kV / 10 A		
Material			
insulating material	PA		
flammability class	V0		
spring material	Spring steel		
contact material	CuSn		
Contact surface	Sn		
Glow-Wire Flammability GWFI	850 °C acc. to IEC 60695-2-12		
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13		
Climatic Data			
upper limit temperature	105 °C		
lower limit temperature	-40 °C		
general			
Tolerance	ISO 2768 -mH		

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Technical Data

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Accessories

P/N	Designation
720036-01-4	Mounting flange gray for type ASP025
720036-02-2	Mounting flange black for type ASP025

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Accessories from

P/N	Designation
11039025	LA1 LON
11039125	LM1 LON
11039225	LM2 LON
11039425	LS1 LON
11039525	LT1 LON
11039613	LT2 LON
11039713	LT3 LON
1108331326IP	MR-DIO4/2-IP65 Modbus RTU
1108341319O1IP	MR-DI4-IP65 Modbus RTU, with external display
11084213IP	MR-AIO4/2-IP65 Modbus RTU
1108511319IP	LF-DI10-IP65 LON
1108521321IP	LF-DO4-IP65 LON
11085413IP	LF-AO4-IP65 LON
1108551326IP	LF-DIO4/2-IP65 LON
11086105IP	LF-TI-IP65 LON
1108831326IP	BMT-DIO4/2-IP65 BACnet MS/TP
1108841319IP	BMT-DI4-IP65 BACnet MS/TP
1109531326IP	EW-DIO4/2-IP65

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!


Counterpart

P/N	Designation
310171	PR015xxVBHC Type 017
31017104	PR01504VBHC Type 017
310391	PT055xxHBHC Type 039
310411	PT065xxVBEN Type 041
314171	PM035xxVBHC (Type 417)
3141710422	PM03504VBHC (Type 417)

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

Illustrations

Dimensional drawing as an example

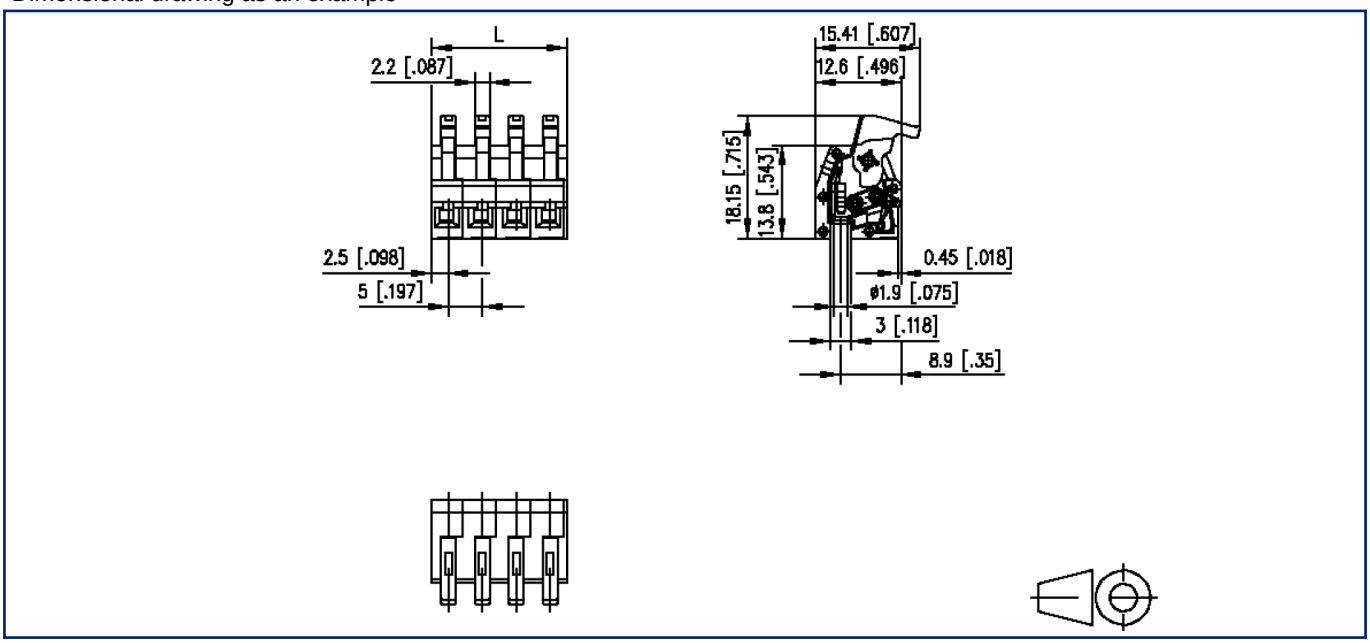

L=(pole size - 1) x centerline + 5 mm [0.197]

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!