

Data sheet ST055xxHBNC AST055

Page 1/5


P/N AST055xx02


xx=number of poles 2025/08/25

Version: A

Illustrations









See enlarged drawings at the end of document

Product specification

- · spring clamp terminal block, solderable
- centerline 5.00 mm, direction of connection 90°
- · fittable without loss of poles
- color black
- eccentric lever







Data sheet ST055xxHBNC AST055

Page 2/5

P/N AST055xx02 xx=number of poles 2025/08/25

Version: A

			version				
Technical Data							
General Data							
Solder pin length	3.1 mm						
min. number of poles	1						
max. number of poles	24						
Insulating material class	CTI 600						
clearance/creepage dist.	4 mm						
Protection category	IP20						
Insul. strip length	6 mm						
Rated current	20 A						
Overvoltage category	III	III	II				
Pollution degree	3	2	2				
Rated voltage	160 V	400 V	400 V				
Rated test voltage	4 kV	4 kV	4 kV				
Terminal data							
rat.wiring solid AWGmax	0.08 mm ² - 2.	0.08 mm ² - 2.5 mm ² / AWG 28 - AWG 12					
rat.wiring strand.AWGmax	0.08 mm ² - 2.	0.08 mm ² - 2.5 mm ² / AWG 28 - AWG 12					
Approvals							
CSUS V/A/AWG	300 / 12 / 2	300 / 12 / 28 - 12					
approval UL - File No.	E121004	E121004					
SEV	160 V / 4 kV	160 V / 4 kV / 19 A					
Material							
insulating material	PA	PA					
flammability class	V0	V0					
spring material	Spring steel	Spring steel					
contact material	CuSn	CuSn					
Contact surface	Sn	Sn					
Glow-Wire Flammability GWFI	850 °C acc. to	850 °C acc. to IEC 60695-2-12					
Glow-Wire Flammability GWIT	775 °C acc. to	775 °C acc. to IEC 60695-2-13					
Climatic Data							
upper limit temperature	105 °C						
lower limit temperature	-40 °C						







Data sheet ST055xxHBNC AST055

Page 3/5

P/N AST055xx02

xx=number of poles 2025/08/25

Version: A

Technical Data

 е	 _	 _	

Tolerance ISO 2768 -mH

Solderability Acc. to JEDEC JESD22-B102E 245°C/5s

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



Data sheet ST055xxHBNC AST055

Page 4/5


P/N AST055xx02

xx=number of poles 2025/08/25

Version: A

Illustrations

Dimensional drawing as an example

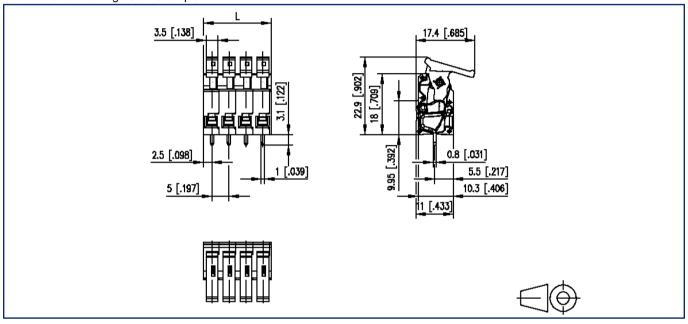

L=(pole size - 1) x centerline + 5 mm [0.197]



Data sheet ST055xxHBNC AST055

Page 5/5

P/N AST055xx02

xx=number of poles 2025/08/25

Version: A

Illustrations

Drill pattern as an example

