

# Data sheet

## ST125xxVDNN AST125

Page 1/5

 P/N  
**AST125xx04**

xx=number of poles


2026/02/10

Version: AC


### Illustrations



Dimensional drawing as an example

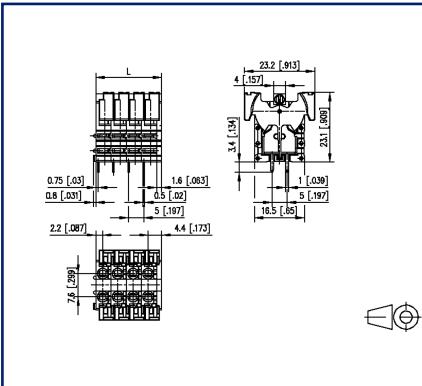

Drill pattern as an example

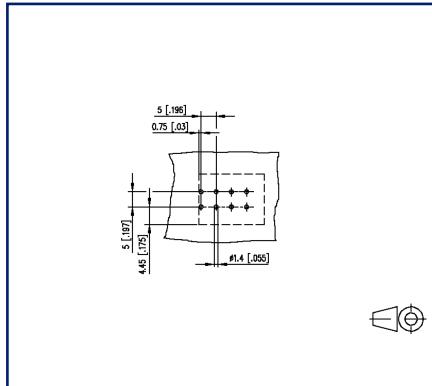

See enlarged drawings at the end of document

### Product specification

- spring clamp terminal block, solderable, double solder pins
- centerline 5.00 mm, direction of connection vertical 0°
- color gray
- finger push-button, double solder pins



**Data sheet**

Page 2/5

**ST125xxVDNN AST125**

P/N

AST125xx04

xx=number of poles

2026/02/10

Version: AC

**Technical Data**
**General Data**

Solder pin length	3.4 mm		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	4.5 mm		
Protection category	IP20		
Insul. strip length	15 mm		
Rated current	15 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	4 kV	4 kV	4 kV

**Terminal data**

rat.wiring solid AWGmax	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12		
rat.wiring strand.AWGmax	0.2 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12		

**Approvals**

 V / A / AWG	300 / 15 / 28 - 12
---	--------------------

approval UL - File No.	E121004
------------------------	---------

	250 V / 13.5 A / T60
---	----------------------

**Material**

insulating material	PA66
flammability class	V0
spring material	Spring steel
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

**Climatic Data**

upper limit temperature	105 °C
lower limit temperature	-40 °C



METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

 Weitere Dokumentation siehe / additional documentation see /  
 documentation supplémentaire voir www.metz-connect.com


**Data sheet**

Page 3/5

**ST125xxVDNN AST125**

P/N

AST125xx04

**xx=number of poles**

2026/02/10

Version: AC

**Technical Data****general**

Tolerance ISO 2768 -mH

Solderability Acc. to JEDEC JESD22-B102E 245°C/5s

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).



**Data sheet**

Page 4/5

**ST125xxVDNN AST125**

P/N

AST125xx04


xx=number of poles

2026/02/10

Version: AC

**Illustrations**

Dimensional drawing as an example

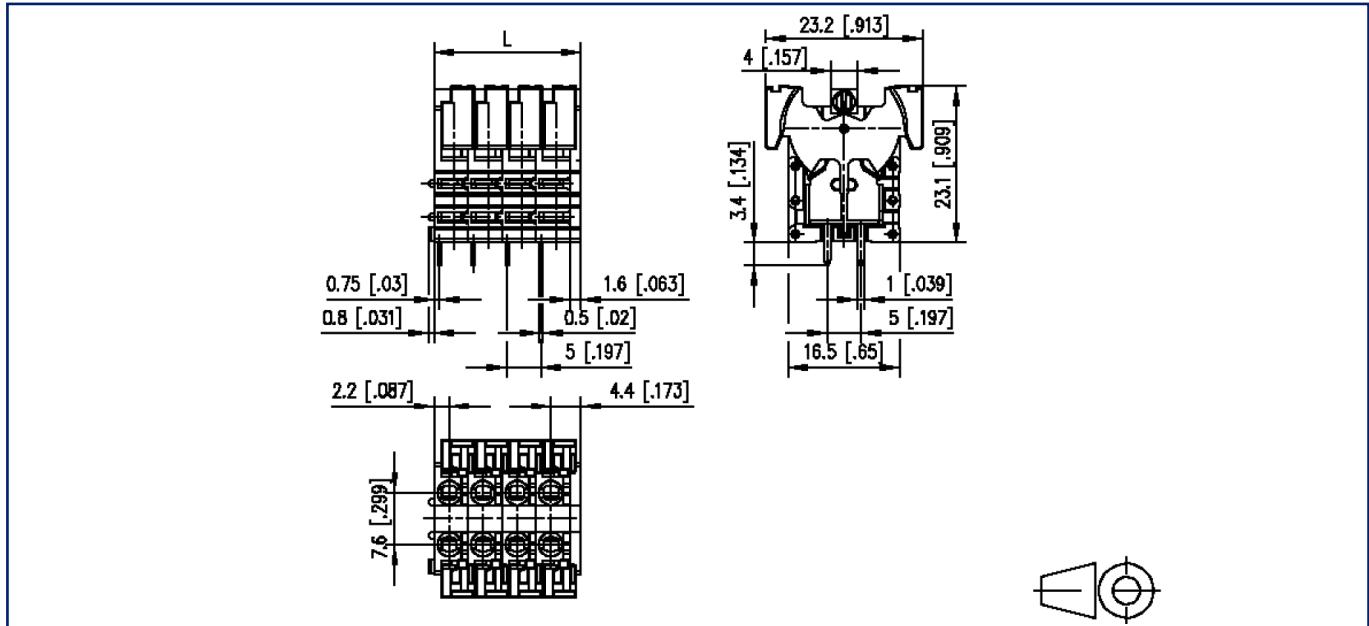

L=(pole size - 1) x centerline + 6.6 mm [0.26]



METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

 Weitere Dokumentation siehe / additional documentation see /  
 documentation supplémentaire voir [www.metz-connect.com](http://www.metz-connect.com)

**Data sheet**

Page 5/5

**ST125xxVDNN AST125**

P/N

AST125xx04



xx=number of poles

2026/02/10

Version: AC

**Illustrations**

Drill pattern as an example

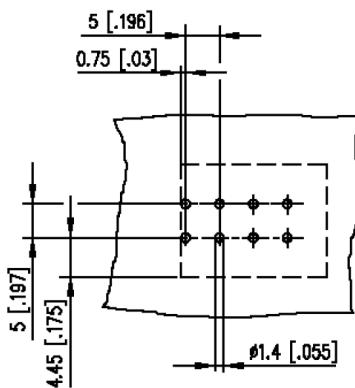

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

Weitere Dokumentation siehe / additional documentation see /  
documentation supplémentaire voir [www.metz-connect.com](http://www.metz-connect.com)