


Data sheet

ST135xxDDNC AST135


Page 1/5

P/N
AST135xx04
xx=number of poles
2026/09/07
Version: M


Illustrations

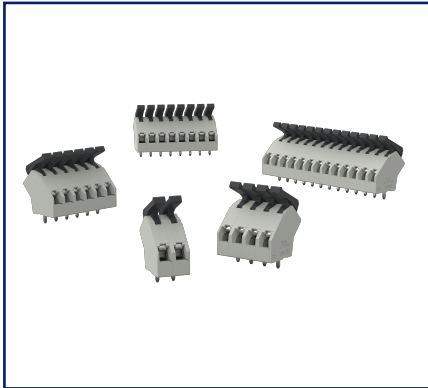

Dimensional drawing as an example

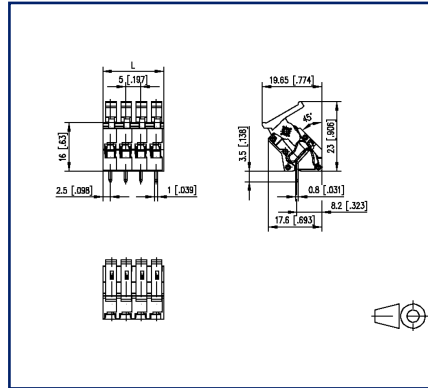

Drill pattern as an example

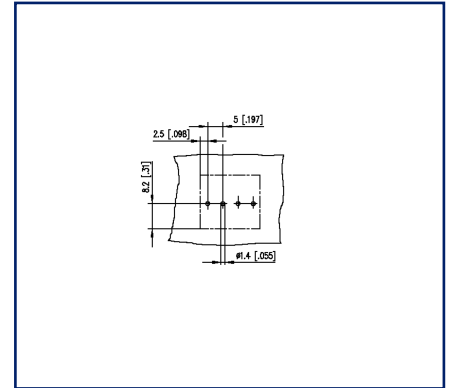

See enlarged drawings at the end of document

Product specification

- spring clamp terminal block, solderable
- centerline 5.00 mm, direction of connection 45°
- fittable without loss of poles
- color gray
- eccentric lever



Data sheet

ST135xxDDNC AST135

Page 2/5

P/N
AST135xx04
xx=number of poles
2026/09/07
Version: M

Technical Data

General Data

Solder pin length	3.5 mm		
Insulating material class	CTI 600		
clearance/creepage dist.	4 mm		
Protection category	IP20		
Insul. strip length	6 mm		
Rated current	19 A		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160 V	400 V	400 V
Rated test voltage	4 kV	4 kV	4 kV

Terminal data

rat.wiring solid AWGmax	0.2 mm ² - 2.5 mm ² / AWG 28 - AWG 12
rat.wiring strand.AWGmax	0.2 mm ² - 2.5 mm ² / AWG 28 - AWG 12

Approvals

 V / A / AWG	300 / 13 / 28 - 12
approval UL - File No.	E121004
	160 V / 4 kV / 19 A

Material

insulating material	PA66
flammability class	V0
spring material	Spring steel
contact material	CuSn
Contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
-----------	--------------

Technical Data

Solderability

Acc. to JEDEC JESD22-B102E 245°C/5s


Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.



Illustrations

Dimensional drawing as an example

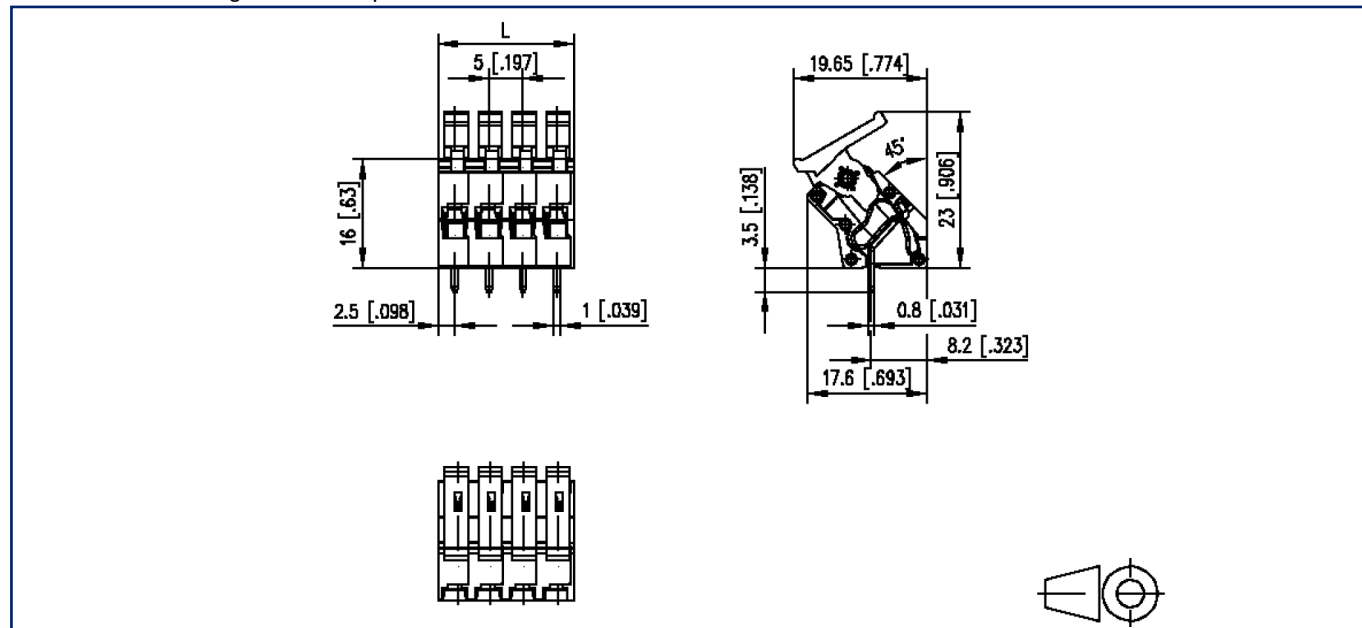

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm [0.197]}$

Data sheet **ST135xxDDNC AST135**

Page 5/5

P/N
AST135xx04
xx=number of poles
2026/09/07
Version: M

Illustrations

Drill pattern as an example

