
# Data sheet

## SR213xxHBNC AST223




**P/N**
**AST223xx02**
**xx=number of poles**
2026/11/18
Version: AB


## Illustrations

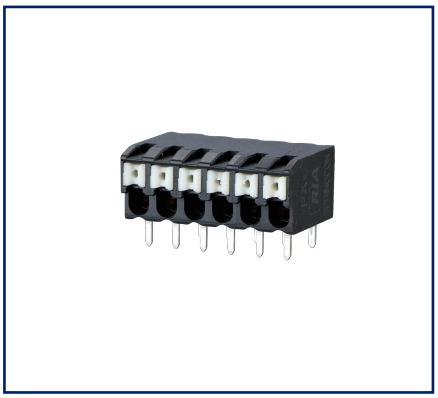

Dimensional drawing as an example

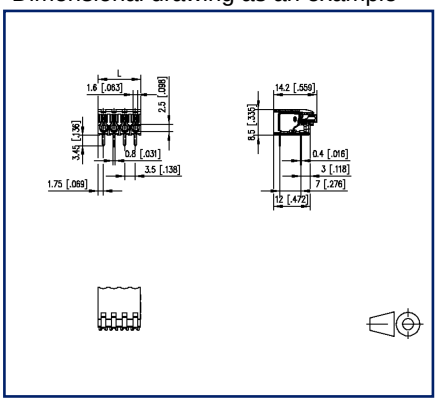


Drill pattern as an example

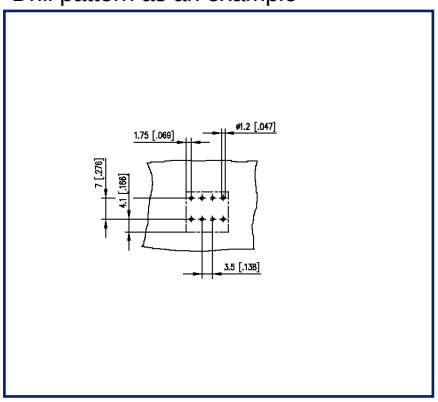


See enlarged drawings at the end of document

### Product specification

- spring clamp terminal block, THR solderable, double solder pins
- centerline 3.50 mm, direction of connection 90°
- fittable without loss of poles
- color black
- Tape & Reel packaging possible
- push-button

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**P/N**
**AST223xx02**
**xx=number of poles**
2026/11/18
Version: AB

## Technical Data

| | | | |
|---|---|---|---|
| **General Data** | | | |
| Solder pin length | 3.45 mm | | |
| min. number of poles | 2 | | |
| max. number of poles | 12 | | |
| Insulating material class | CTI 600 | | |
| clearance/creepage dist. | 2 mm | | |
| Protection category | IP20 | | |
| Insul. strip length | 8.5 mm | | |
| Rated current | 13.5 A | | |
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Rated voltage | 160 V | 400 V | 400 V |
| Rated test voltage | 4 kV | 4 kV | 4 kV |
| **Terminal data** | | | |
| rat.wiring solid AWGmax | 0.08 mm² - 1.5 mm² / AWG 28 - AWG 16 | | |
| rat.wiring strand.AWGmax | 0.08 mm² - 1.5 mm² / AWG 28 - AWG 16 | | |
| **Approvals** | | | |
| c UL us V / A / AWG | 150 / 10 / 28 - 16 | | |
| approval UL - File No. | E121004 | | |
| SEV | 130 V / 17.5 A / T60 | | |
| **Material** | | | |
| insulating material | PA66/6T | | |
| flammability class | V0 | | |
| spring material | Spring steel | | |
| contact material | CuSn | | |
| Contact surface | Sn | | |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 | | |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 | | |
| **Climatic Data** | | | |
| upper limit temperature | 105 °C | | |
| lower limit temperature | -40 °C | | |

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Technical Data

### general

| | |
|---|---|
| Tolerance | ISO 2768 -mH |
| Solderability | reflowable |

### Application note


This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way.

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

**P/N**
**AST223xx02**
**xx=number of poles**
2026/11/18
Version: AB

## Illustrations

Dimensional drawing as an example

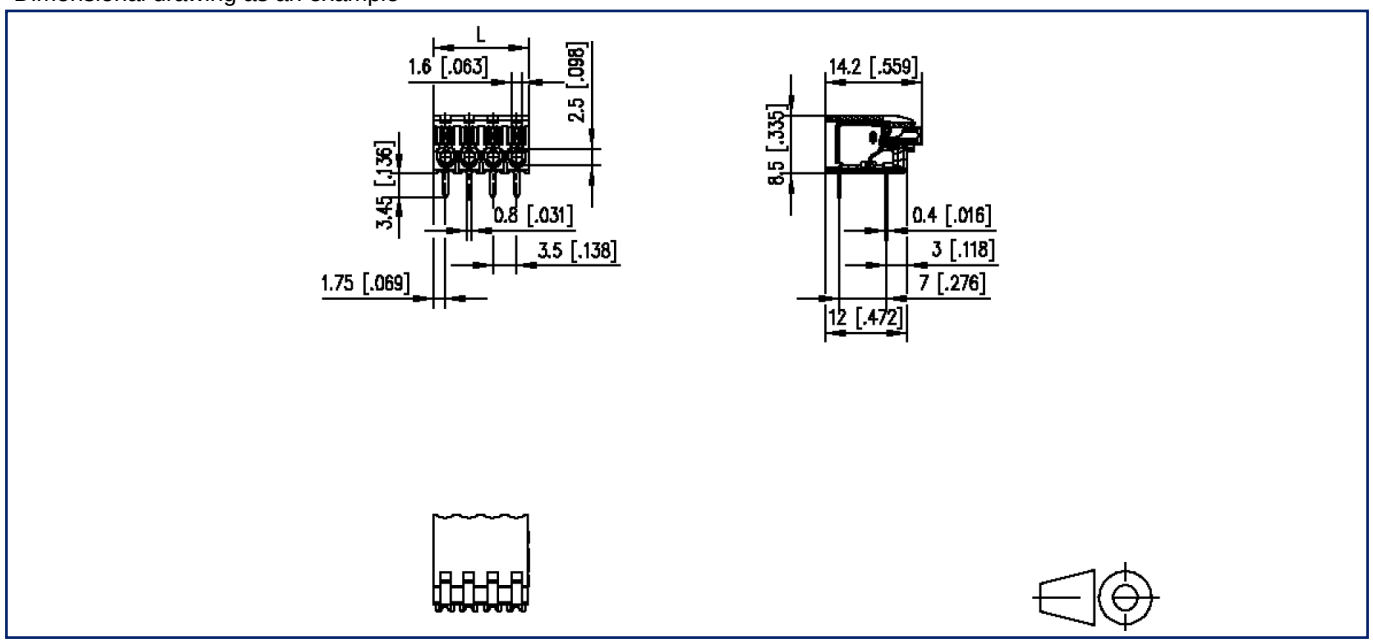



L=(pole size - 1) x centerline + 3.5 mm [0.138]

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

## Illustrations

Drill pattern as an example

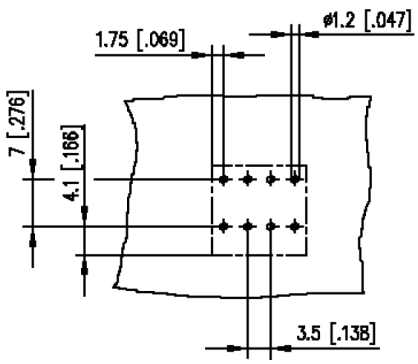


© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!