

# Data sheet

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm, field assembly, with flange**


Page 1/8

P/N  
MMF881A315-0001  
EAN 4250184171096  
2026/05/20  
Version: BG


## Illustrations



Dimensional drawing

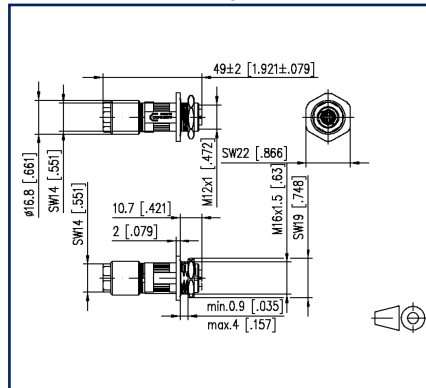

Drill pattern

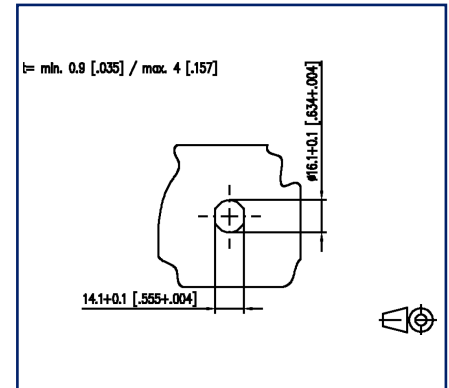

See enlarged drawings at the end of document

## Product specification

- 8-pole M12 jack for field assembly Cat.6<sub>A</sub>
- per IEC 61076-2-109 with flange
- suitable for 10 GBit as per IEEE 802.3an
- AWG 26/1 - 22/1, AWG 26/7 - 22/7 can be connected
- solid copper wire diameter 0.4 to 0.64 mm
- stranded copper wire diameter 0.48 to 0.76 mm
- wire diameter with isolation up to 1.6 mm
- overall cable diameter from 6.0 to 9.7 mm
- jack consists of only two parts
- easy assembly without special tools
- industry-compatible zinc die-cast housing
- suitable for applications in the railway industry according to data sheet



Data sheet

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm, field assembly, with flange**

P/N  
MMF881A315-0001  
EAN 4250184171096  
2026/05/20  
Version: BG

**Technical Data**

**General Data**

Electromagnetic measurement according to MICE	E2
Design	Jack
Mounting style	back side
Shielding	shielded
Transmission technology	Copper
Dimensions	
Dimension (L x W x H)	49 mm x 16.8 mm x 16.8 mm
Dimension (L x W x H)	1.929 in. x 0.661 in. x 0.661 in.
Field assembly ability	yes

**Transmission characteristics**

Category (ISO)	6 <sub>A</sub>
Category (TIA)	6A
Remote Powering	yes
PoE	IEEE 802.3af
PoE plus	IEEE 802.3at
UPoE	yes
4PPoE	IEEE 802.3bt
Transmission rate up to 10 GBit	IEEE 802.3an

**Connections/interfaces**

Connector technology interface 1	IDC-connection
Connector technology interface 2	M12-jack
Coding interface 2	X-coded
Number of ports interface 2	1
Number of ports interface 2 equipped	1
Number of positions/contacts interface 1	8
Number of positions/contacts interface 2	8

Data sheet

Page 3/8

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm, field assembly, with flange**

P/N  
MMF881A315-0001  
EAN 4250184171096  
2026/05/20  
Version: BG

**Technical Data**

**Connections/interfaces**

Termination data, solid wire (min. - max.)

Conductor cross section, solid wire	AWG 26/1 - AWG 22/1
Conductor cross section, solid wire	0.128 mm <sup>2</sup> - 0.324 mm <sup>2</sup>
Conductor diameter, solid wire (bare copper)	0.409 mm - 0.643 mm
Conductor diameter, solid wire (bare copper)	0.016 in. - 0.025 in.

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire	AWG 26/7 - AWG 22/7
Conductor cross section, stranded wire	0.141 mm <sup>2</sup> - 0.355 mm <sup>2</sup>
Conductor diameter, stranded wire (bare copper)	0.483 mm - 0.762 mm
Conductor diameter, stranded wire (bare copper)	0.019 in. - 0.03 in.

Aderdurchmesser (min.-max.)

Core diameter (conductor with insulation)	0.85 mm - 1.6 mm
Core diameter (conductor with insulation)	0.033 in. - 0.063 in.

Cable sheath diameter (min. - max.)

Cable sheath diameter	6 mm - 9.70
Cable sheath diameter	0.236 in. - 0.382

Cable access/outlet	straight M12
---------------------	--------------

**Electrical characteristics**

Current carrying capacity	0.5 A
Rated voltage	50 V AC / 60 V DC
Through resistance	max. 5 mOhm
Insulation resistance	min. 100 MOhm

**Mechanical data**

Mounting method	screwable
Insertion and withdrawal force	max. 30 N
Life - Number of mating cycles	min. 100

Data sheet

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm, field assembly, with flange**

P/N  
MMF881A315-0001  
EAN 4250184171096  
2026/05/20  
Version: BG

**Technical Data**

**Materials and material properties**

Material - Housing	GD-Zn
Material - Contact	CuZnPb (brass)
Material - Contact finish	Ni + Au (nickel-gold)
Material - Contact carriers	PA UL 94 V0
Material - Shield	CuSn
Material - Shield finish	Sn
Material - Stuffer cap	PA UL94-V0
Halogen free	yes
Material - Finish	Ni (nickel)
RoHS	compliant

**Environmental conditions**

Temperature (min. - max.)	
Temperature - Storage °C	-40 °C - 85 °C
Temperature - Storage °F	-40 °F - 185 °F
Temperature - Operating °C	-40 °C - 85 °C
Temperature - Operating °F	-40 °F - 185 °F
Particulate ingress interface 2	IP6X when plugged in
Liquid ingress/immersion interface 2	IPX5 when plugged in, IPX7 when plugged in
Overvoltage category	II
Degree of pollution	2
Shock	490 m/s <sup>2</sup>

**Approvals**

UL listed (file no.)  DUXR.E178484

Data sheet

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm, field assembly, with flange**

P/N  
**MMF881A315-0001**  
**EAN 4250184171096**  
 2026/05/20  
 Version: BG

**Technical Data**

**Standards/Regulations**

Application-specific communications cabling systems	
Profinet	yes
Connectors for electronic equipment	
circular connector	DIN EN 61076-2-109:2010-08
Connectors for electronic equipment - Tests and measurements	
Test standard for connectors (engaging and separating connectors under electrical load)	DIN-EN 60512-99-001, DIN-EN 60512-99-002
Railway applications	
Contact holder	Thermoplastic HL1-HL3; R22, R23 according to EN 45545-2:2020+A1:2023
Flammable mass (g)	1.2 g
Stuffer cap	Thermoplastic HL1-HL3; R22, R23 according to EN 45545-2:2020+A1:2023
Flammable mass (g)	0.97 g
Sealings	Elastomer
Flammable mass (g)	1.74 g
Shock and vibration	EN 50155:2021, EN 61373:2010 Class 1 Category B
Salt spray	EN 50155:2021, (DIN EN 60068-2-11:2000-02/ 48-hour KA test)

**Classifications**

ETIM 7.0	EC002635
ETIM 8.0	EC002635
ETIM 9.0	EC002635
ETIM 10.0	EC002635

**Packing details**

Type of packaging	10 pc(s) / box
-------------------	----------------

**Application note**

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

Data sheet

Page 6/8

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm,  
field assembly, with flange**

P/N

MMF881A315-0001

EAN 4250184171096

2026/05/20

Version: BG

## Accessories

P/N	Designation
130670-E	KAPRi plus cable and installation tester
130674-E	KAPRi plus extension set M12 X-coded



Data sheet

Page 7/8

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm,  
field assembly, with flange**

P/N

MMF881A315-0001


EAN 4250184171096

2026/05/20


Version: BG

## Illustrations

Dimensional drawing

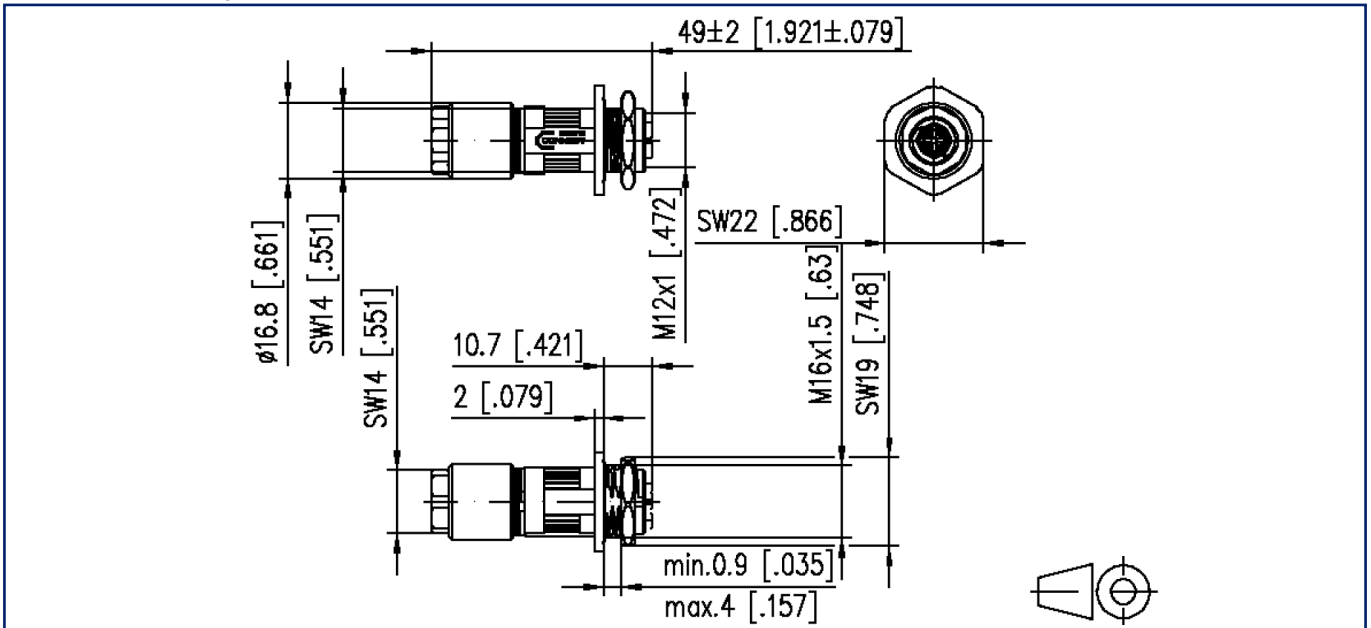

Drill pattern

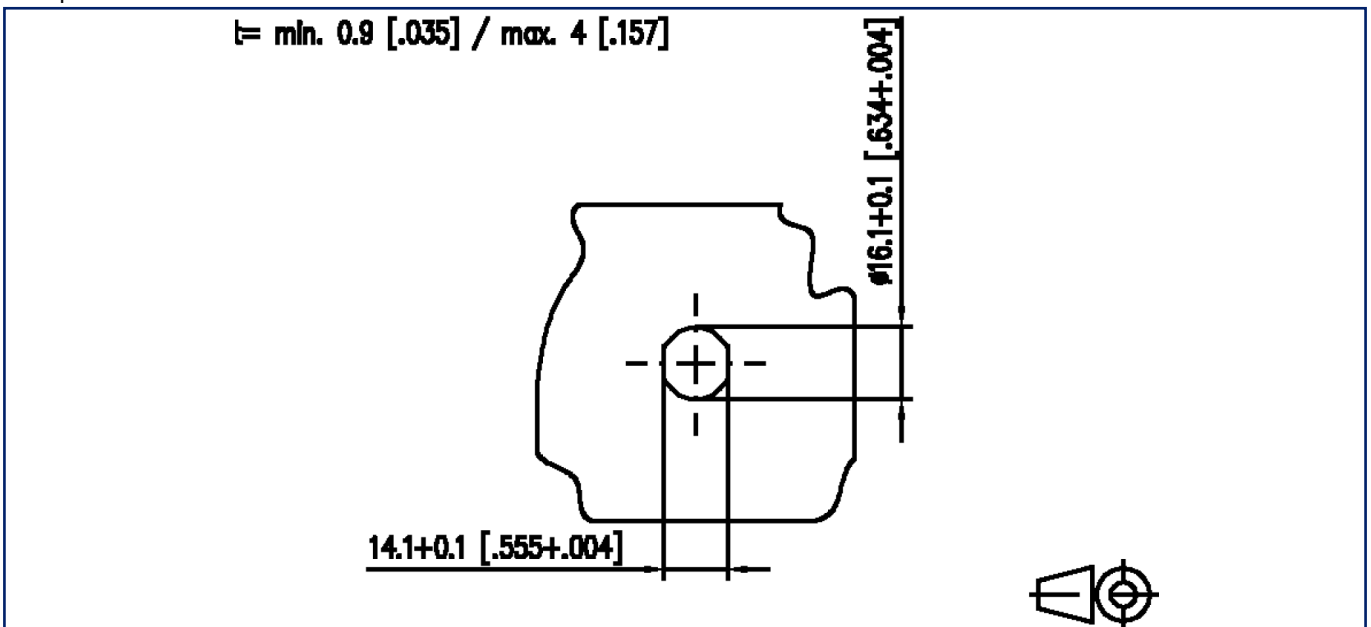

Data sheet


Page 8/8

**M12 jack, X-coded, IP67, Cat.6<sub>A</sub>, Ø 6-9.7 mm,  
field assembly, with flange**

P/N  
MMF881A315-0001  
EAN 4250184171096  
2026/05/20  
Version: BG

**Illustrations**

Wiring diagram

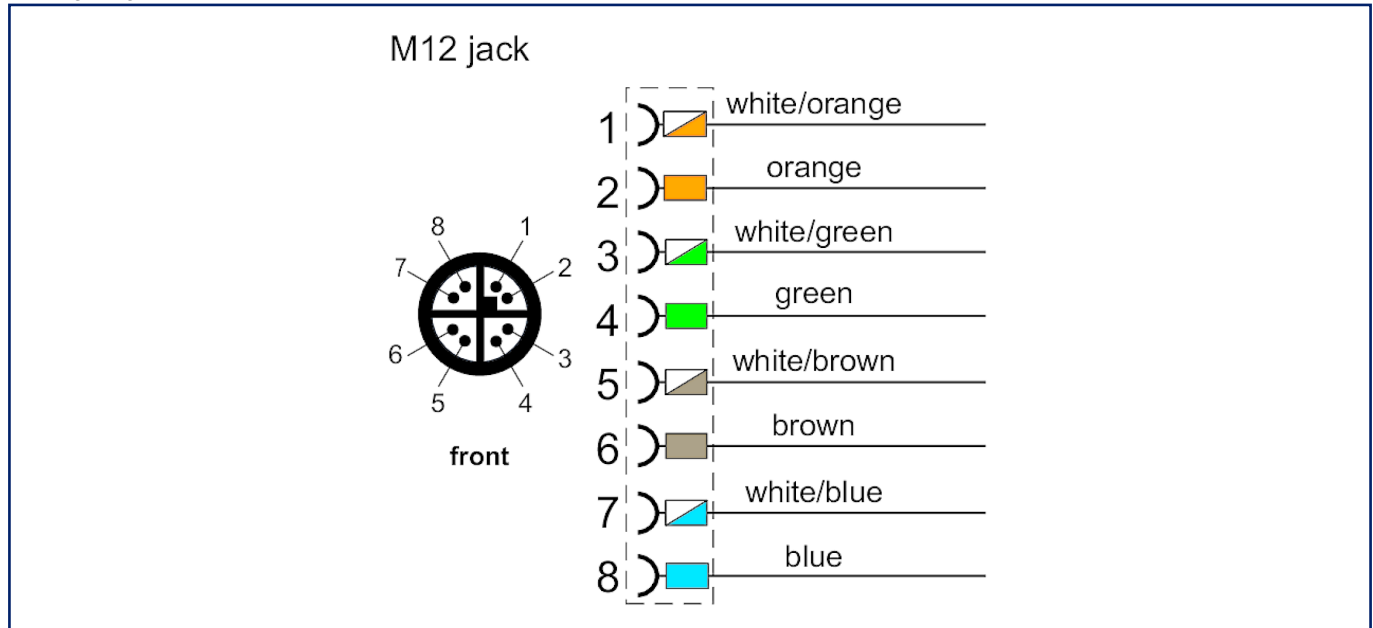

© 2026 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!