


# Data sheet

## RP035xxHBLD Type 314

### Illustrations



Dimensional drawing as an example

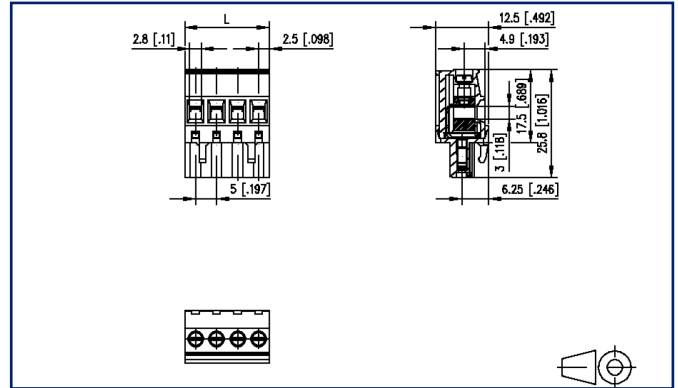

See enlarged drawings at the end of document

### Product specification

- screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- lift system, fittable without loss of poles
- color black
- wire entry codeable side perpendicular to plug direction



## Technical Data

### General Data

|                           |           |       |       |
|---------------------------|-----------|-------|-------|
| Tightening torque SEV     | 0.5 Nm    |       |       |
| Tightening torque UL      | 4.4 lb-in |       |       |
| min. number of poles      | 2         |       |       |
| max. number of poles      | 24        |       |       |
| Insulating material class | CTI 600   |       |       |
| clearance/creepage dist.  | 3.2 mm    |       |       |
| Protection category       | IP20      |       |       |
| Insul. strip length       | 8 mm      |       |       |
| Rated current             | 12 A      |       |       |
| Overvoltage category      | III       | III   | II    |
| Pollution degree          | 3         | 2     | 2     |
| Rated voltage             | 160 V     | 400 V | 400 V |
| Rated test voltage        | 4 kV      | 4 kV  | 4 kV  |

### Terminal data

|                          |  |  |  |
|--------------------------|--|--|--|
| rat.wiring solid AWGmax  | 0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12 |  |  |
| rat.wiring strand.AWGmax | 0.08 mm <sup>2</sup> - 2.5 mm <sup>2</sup> / AWG 28 - AWG 12 |  |  |

### Approvals

|                    |  |  |  |
|--------------------|--|--|--|
| extended wiring UL | 2 AWG 16-18, or 1 AWG 16 stranded with 1 AWG 18 solid, or 1 AWG 16 stranded with 1 AWG 18 stranded |  |  |
|--------------------|--|--|--|



V / A / AWG

300 / 16 / 28 - 12

approval UL - File No.

E121004



320 V / 4 kV / 13.5 A

### Material

|                        |        |
|------------------------|--------|
| insulating material    | PA66   |
| flammability class     | V0     |
| contact material       | CuSn   |
| Contact surface        | Sn     |
| terminal body thread   | M3     |
| terminal body material | CuZnPb |
| terminal body surface  | Ni     |



## Technical Data

|                             |                               |
|-----------------------------|-------------------------------|
| screw thread                | M3                            |
| screw material              | 8,8                           |
| screw surface               | Zn Cr(VI)-frei/free           |
| Glow-Wire Flammability GWFI | 960 °C acc. to IEC 60695-2-12 |
| Glow-Wire Flammability GWIT | 775 °C acc. to IEC 60695-2-13 |

## Climatic Data

|                         |        |
|-------------------------|--------|
| upper limit temperature | 105 °C |
| lower limit temperature | -40 °C |

## general

|           |              |
|-----------|--------------|
| Tolerance | ISO 2768 -mH |
|-----------|--------------|

## Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).

# U | Contact

Data sheet  
RP035xxHBLD Type 314

Page 4/6

P/N  
313141xx

xx=number of poles

2025/04/30

Version: Y

## Accessories

| P/N         | Designation                                     |
|-------------|---|
| 700025-01-9 | Coding star white with a group of 6 coding pins |




**Counterpart**

| P/N    | Designation          |
|--------|----------------------|
| 311761 | PR065xxHBBN Type 176 |
| 311771 | PR065xxVBBN Type 177 |
| 312701 | PT175xxVGDN Type 270 |
| 312741 | PT165xxVGDN Type 274 |
| 312761 | PT165xxHGDN Type 276 |
| 312781 | PT105xxVGDN Type 278 |
| 312801 | PT105xxHGDN Type 280 |
| 313191 | PT115xxVBEC Typ 319  |
| 313201 | PT115xxVBBN Type 320 |
| 313291 | PT115xxHBEC Type 329 |
| 313301 | PT115xxHBBN Type 330 |
| 313371 | PR075xxHBEL Type 337 |
| 313381 | PR075xxHBER Type 338 |
| 314761 | PR065xxHBEC Type 476 |
| 314771 | PR065xxVBEC Type 477 |

## Illustrations

Dimensional drawing as an example

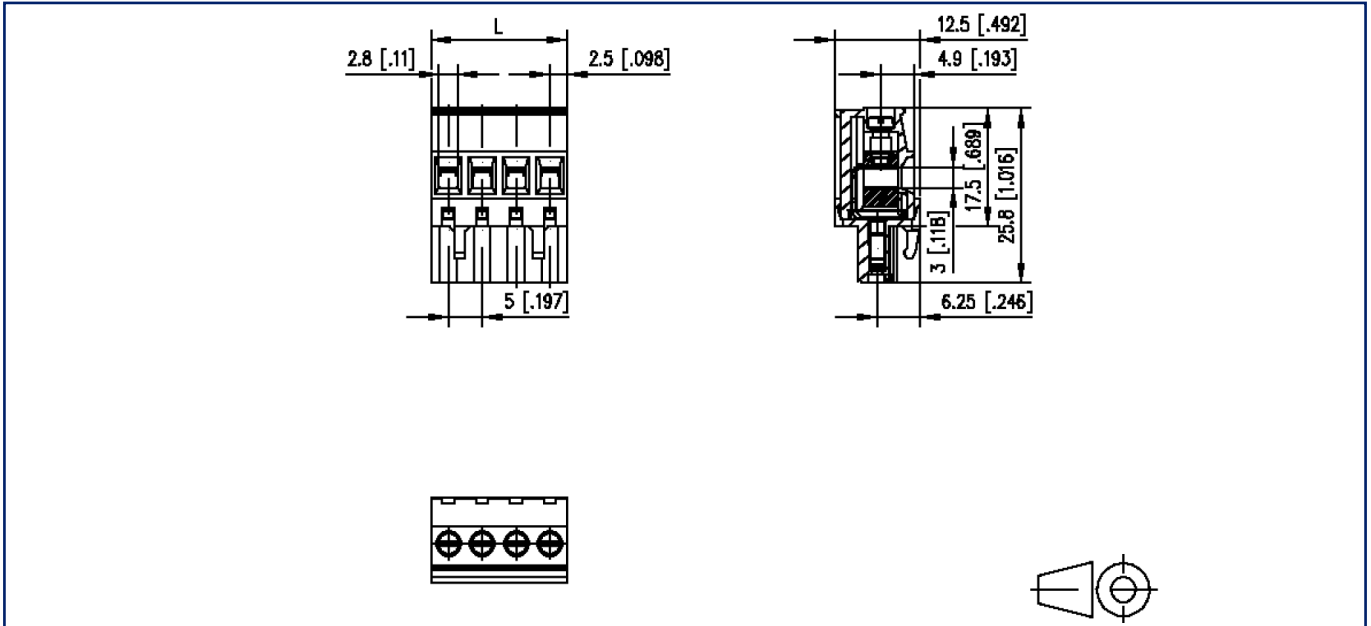

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm} [0.197]$